



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

Natural Light Energy Systems, LLC
DBA Kennedy Skylights
10829 N. 23rd Avenue
Phoenix, AZ 85029

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Model "ICMG" Impact Curb Mounted Glass Skylight

APPROVAL DOCUMENT: Drawing titled "Model "ICMG" Impact Curb Mounted Glass Skylight anchorage details", sheets 1 through 5 of 5, dated 07/04/25, prepared by Robert James Amoruso, P.E., signed and sealed by Robert James Amoruso, P.E., on 07/08/25, bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises & renews** NOA #24-0624.03 and consists of this page 1 and evidence submitted pages E-1, E-2, E-3 & E-4 as well as approval document mentioned above.

The submitted documentation was reviewed by **Helmy A. Makar, P.E., M.S.**



Helmy A. Makar
08/07/25

NOA No. 25-0718.04
Expiration Date: 09/22/2030
Approval Date: 08/07/2025

Natural Light Energy Systems, LLC
DBA Kennedy Skylights

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 15-0922.16

A. DRAWINGS

1. *Drawing titled "ICMG Subframe Plan, Deck Plan, Skylight Plan and Skylight Section", sheets 4 through 4 of 4, dated 07/01/2010, prepared by Kennedy Skylights, signed and sealed by James D. Wells, Jr., P.E.*

B. TESTS "Submitted under NOA # 09-0630.09"

1. *Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of Series ICMG Aluminum Skylights, prepared by National Certified Testing Laboratories, Test Report No. 210-3041-1,2, dated 10/05/2004, signed and sealed by Gerald J. Ferrara, P.E.*

C. CALCULATIONS "Submitted under NOA # 09-0630.09"

1. *Anchor calculations prepared by J & L Wells Consulting LLC, on 08/04/2010, signed and sealed by James D. Wells, Jr., P.E.*

D. QUALITY ASSURANCE

1. *Miami-Dade Department of Regulatory and Economic Resources (RER)*

E. MATERIAL CERTIFICATIONS

1. *Notice of Acceptance No. 14-1105.08 issued to Cardinal LG Company for their "Cardinal Sea-Storm PET Glass Interlayer", approved on 02/12/2015 and expiring on 01/13/2016.*

F. STATEMENTS

1. *Statement letter of code conformance to the 5th edition (2014) FBC issued by J & L Wells Consulting LLC, dated 09/15/2015, signed and sealed by James D. Wells, Jr., P.E.*
2. *Statement letter of no financial interest issued by J & L Wells Consulting LLC, dated 09/15/2015, signed and sealed by James D. Wells, Jr., P.E.*


Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 25-0718.04
Expiration Date: 09/22/2030
Approval Date: 08/07/2025

Natural Light Energy Systems, LLC
DBA Kennedy Skylights

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 16-0329.08

A. DRAWINGS

1. *Drawing titled "ICMG Subframe Plan, Deck Plan, Skylight Plan and Skylight Section", sheets 1 through 4 of 4, dated 07/01/2010, prepared by James David Wells, Jr., P.E., signed and sealed by James D. Wells, Jr., P.E., on 02/03/2017.*

B. TESTS

1. *None.*

C. CALCULATIONS "Submitted under NOA # 09-0630.09"

1. *None.*

D. QUALITY ASSURANCE

1. *Miami-Dade Department of Regulatory and Economic Resources (RER)*

E. MATERIAL CERTIFICATIONS

1. *None.*

F. STATEMENTS

1. *Statement letter of code conformance to the 5th edition (2014) FBC issued by J & L Wells Consulting LLC, dated 02/03/17, signed and sealed by James D. Wells, Jr., P.E.*

3. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 19-0313.08

A. DRAWINGS

1. *None.*

B. TESTS

1. *None.*

C. CALCULATIONS

1. *None.*

D. QUALITY ASSURANCE

1. *Miami-Dade Department of Regulatory and Economic Resources (RER)*

E. MATERIAL CERTIFICATIONS

1. *None.*

F. STATEMENTS

1. *Statement letter of code conformance to the 6th edition (2017) FBC issued by J & L Wells Consulting LLC, dated 10/23/17, signed and sealed by James D. Wells, Jr., P.E.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 25-0718.04
Expiration Date: 09/22/2030
Approval Date: 08/07/2025

Natural Light Energy Systems, LLC
DBA Kennedy Skylights

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

4. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 20-0722.06

A. DRAWINGS

1. *None.*

B. TESTS

1. *None.*

C. CALCULATIONS

1. *None.*

D. QUALITY ASSURANCE

1. *Miami-Dade Department of Regulatory and Economic Resources (RER)*

E. MATERIAL CERTIFICATIONS

1. *None.*

F. STATEMENTS

1. *Statement letter of code conformance to the 7th edition (2020) FBC issued by J & L Wells Consulting LLC, dated 08/01/2020, signed and sealed by James D. Wells, Jr., P.E.*

5. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 24-0624.03

A. DRAWINGS

1. *None.*

B. TESTS

1. *None.*

C. CALCULATIONS

1. *None.*

D. QUALITY ASSURANCE

1. *Miami-Dade Department of Regulatory and Economic Resources (RER)*

E. MATERIAL CERTIFICATIONS

1. *None.*

F. STATEMENTS

1. *Statement letter of code conformance to the 8th edition (2023) FBC issued by J & L Wells Consulting LLC, dated 06/19/2024, signed and sealed by James D. Wells, Jr., P.E.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 25-0718.04
Expiration Date: 09/22/2030
Approval Date: 08/07/2025

Natural Light Energy Systems, LLC
DBA Kennedy Skylights

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

6. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing titled "Model "ICMG" Impact Curb Mounted Glass Skylight anchorage details", sheets 1 through 5 of 5, dated 07/04/25, prepared by Robert James Amoruso, P.E., signed and sealed by Robert James Amoruso, P.E., on 07/08/25.

B. TESTS

1. None.

C. CALCULATIONS

1. Anchor calculations, 20 pages, dated 07/03/25, prepared by Robert James Amoruso, P.E., signed and sealed by Robert James Amoruso, P.E., on 07/08/25.

D. QUALITY ASSURANCE


1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to the 8th edition (2023) FBC issued by Robert James Amoruso, P.E., signed and sealed by Robert James Amoruso, P.E., on 07/07/25.



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 25-0718.04
Expiration Date: 09/22/2030
Approval Date: 08/07/2025

NATURAL LIGHT ENERGY SYSTEMS, dba KENNEDY SKYLIGHTS

MODEL "ICMG" CURB MOUNTED GLASS SKYLIGHT - LMI

INSTALLATION ANCHORAGE DETAILS

GENERAL NOTES:

1. THE PRODUCT ANCHORAGE SHOWN HEREIN IS DESIGNED TO COMPLY WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), BUILDING & RESIDENTIAL VOLUME REQUIREMENTS INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ) FOR LARGE MISSILE IMPACT (EQUIVALENT TO WIND ZONE 4, MISSILE LEVEL D) AT THE DESIGN PRESSURE STATED HEREIN.
2. THE PRODUCT DETAILS CONTAINED HEREIN ARE BASED UPON SIGNED AND SEALED TEST REPORT NO. NCTL-210-3041-1, 2, DATED 10/5/2004 AND ASSOCIATED LABORATORY STAMPED DRAWINGS BY NCTL, 8350 PARKLINE BLVD. SUITE 320, ORLANDO, FL 32809 AND SIGNED AND SEALED BY GERALD J. FERRARA, P.E. TESTING WAS CONDUCTED TO THE FOLLOWING:

2.1. TAS 201-94

2.2. TAS 202-94

2.3. TAS 203-94
3. GLAZING MEETS THE REQUIREMENTS OF THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), BUILDING & RESIDENTIAL VOLUMES AND CURRENT MIAMI-DADE NOTICE OF ACCEPTANCE (NOA) AS FOLLOWS.

3.1. GLAZING MEETS THE REQUIREMENTS OF ASTM E1300-16

3.2. LAMINATING INTERLAYER TROSIFOL PVB BY KURARAY AMERICA MEETS CURRENT MIAMI-DADE NOA.

3.3. SEE SHEET 4 FOR GLAZING DETAIL.
4. SUPPLEMENTAL WOOD FRAMING REQUIRED TO ATTACHED THE SKYLIGHT TO THE ROOF DECK SUBSTRATE SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. FRAMING DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT.
5. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, THEN THE BUILDING OFFICIAL MAY ELECT ONE OF THE FOLLOWING OPTIONS:

5.1. OUTSIDE HVHZ: REQUIRE THAT A LICENSED ENGINEER OR ARCHITECT PREPARE AND SUBMIT SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

5.2. INSIDE HVHZ: REQUIRE A ONE-TIME SITE SPECIFIC APPROVAL BE APPLIED FOR AND OBTAINED FROM THE MIAMI-DADE COUNTY PRODUCT CONTROL DIVISION.
6. IMPACT PROTECTIVE SYSTEM REQUIREMENTS:

6.1. IN HVHZ AREAS, USE OF AN APPROVED IMPACT PROTECTIVE SYSTEM COMPLYING WITH THE HVHZ REQUIREMENTS OF THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), BUILDING & RESIDENTIAL VOLUMES IS NOT REQUIRED FOR THE PRODUCT(S) HEREIN.

6.2. IN NON-HVHZ AREAS WHERE WIND BORNE DEBRIS PROTECTION REQUIREMENTS EXIST, USE OF AN IMPACT PROTECTIVE SYSTEM COMPLYING WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), BUILDING & RESIDENTIAL VOLUMES IS NOT REQUIRED FOR THE PRODUCT(S) HEREIN.
7. WHEN APPLICABLE AND IN ACCORDANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), BUILDING & RESIDENTIAL VOLUMES, DISSIMILAR METALS INCLUDING FASTENERS THAT MAY COME IN CONTACT WITH ALUMINUM SKYLIGHT FRAMING WOOD SHALL HAVE BEEN PROTECTED.
8. SELF-FLASHING CURB CONSTRUCTION AND MOUNTING DETAILS:

8.1. THE CURB SUPPLIED BY KENNEDY SKYLIGHTS, CONSTRUCTED AND MOUNTED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), BUILDING & RESIDENTIAL VOLUMES FOR THE TYPE OF CONSTRUCTION CLASSIFICATION WHERE THE SKYLIGHT IS TO BE INSTALLED IS ALLOWED. SELF-FLASHING CURB HEIGHT SHALL BE A MINIMUM 4" AND SHALL BE CONSTRUCTED IN A MANNER SUCH THAT THE SKYLIGHT IS A LEAST 4" ABOVE THE PLANE OF THE ROOF.

8.1.1. A 4" MINIMUM DISTANCE FROM ANGLE LIP TO ROOF SURFACES FOR SHINGLE OR BUILT-UP-ROOFING (B.U.R.) WITHOUT INSULATION. FOR B.U.R. WITH INSULATION OR TILE ROOF, ADD TILE HEIGHT AND INSULATION THICKNESS TO 4".

8.4. INTEGRATION WITH ROOF ASSEMBLY SHALL BE IN ACCORDANCE WITH CHAPTER 15 OF THE CURRENT EDITION OF THE FLORIDA BUILDING CODE AND CHAPTER 9 OF THE CURRENT EDITION OF THE FLORIDA RESIDENTIAL CODE.

8.5. IF REQUIRED TO MEET SPECIFIC INSTALLATION REQUIREMENTS, ANY ADDITIONAL INSTALLATION DETAILING AND ENGINEERED INSTALLATION EVALUATION BY A LICENSED DESIGN PROFESSIONAL WILL BE REQUIRED FOR SUBMITTAL IN ADDITION TO THIS PRODUCT EVALUATION DOCUMENT.

PERFORMANCE RATING		
MAXIMUM FRAME SIZE (IN)	DESIGN PRESSURE RATING (PSF)	IMPACT RATING
50-1/2 X 50-1/2 (FRAME) 58-5/8 X 58-5/8 (FLANGE)	+/-60	HVHZ - LARGE MISSILE IMPACT (WIND ZONE 4, MISSILE LEVEL D EQUIVALENT)

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 25-0718.04
Expiration Date 09/22/2030
By *Hely A. Mahe*
Miami Dade Product Control

INSTALLATION NOTES:

1. INSTALL ALUMINUM SKLIGHT FRAME (ITEM NO. 1) ONTO CURB (ITEM NO. 7 & 8) USING #8 SELF-DRILLING/TAPPING SCREWS (ITEM NO. 5). SPACE ANCHORS 3-1/2" MAX. FROM ENDS AND 2 ADDITIONAL ANCHORS EVENLY SPACED THEREAFTER AS SHOWN ON ELEVATION SECTION ON SHEET 4. A TOTAL OF FOUR (4) ANCHORS IS REQUIRED ON EACH SIDE OF THE SKYLIGHT.

1.1. SEE SHEET 2 FOR INSTALLATION ANCHOR SCHEDULE.
2. INSTALL 2 x 5-1/2 WOOD CURB (ITEM NO. 8) AND ALUMINUM FLASHING (ITEM 37) TO ROOF SUBSTRATE USING NO. 8 WOOD SCREWS, NO. 8 SELF-DRILLING SCREWS OR 0.099" DIAMETER RING SHANK NAILS IN ACCORDANCE WITH THE EDGE DISTANCE, ON CENTER SPACING AND ANCHOR QUANTITIES SHOWN IN THE INSTALLATION ANCHOR SCHEDULE ON SHEET 2 AND ANCHOR LOCATION LAYOUT ON SHEET 3.

2.1. NOTE THAT SELF-DRILLING SCREWS (SDS) ARE REQUIRED FOR SCREW INSTALLATION INTO PLYWOOD OR OSB ROOF SHEATHING TO ALLOW FOR FULL THREAD ENGAGEMENT WITH THE ROOFING SHEATHING.

2.2. FOR SKYLIGHT SIZES (WIDTH AND/OR HEIGHT) LESS THAN THAT SHOWN IN SHEET 3, THE QUANTITY OF ANCHORS CAN BE REDUCED WHILE MAINTAINING THE ON CENTER SPACING SHOWN EITHER IN THE INSTALLATION ANCHOR SCHEDULE ON SHEET 2 OR THE ANCHOR LOCATIONS LAYOUT ON SHEET 3.

2.3. SEE SHEET 2 FOR INSTALLATION ANCHOR SCHEDULE.
3. INSTALLATION ANCHOR CAPACITIES ARE BASED ON THE MINIMUM SUBSTRATE REQUIREMENTS SHOWN IN THE INSTALLATION ANCHOR SCHEDULE ON SHEET 2.

3.1. PLYWOOD SPECIES GROUP 1 OR 2 PER APA VOLUNTARY PRODUCT STANDARD PS 1. OSB SHEATHING GRADE PER APA VOLUNTARY PRODUCT STANDARD PS 2.

3.2. PLYWOOD OR OSB CAPACITIES ARE BASED ON THE MINIMUMS SHOWN ABOVE. HOWEVER, THESE MINIMUMS MAY NOT NECESSARILY MET FLORIDA BUILDING CODE REQUIREMENTS BASED ON LOCALITY AND/OR OTHER CODE-BASED RESTRICTIONS. USERS MUST ENSURE THAT THE ROOFING SUBSTRATE MEETS ALL CODE RELATED REQUIREMENTS.
4. APPLY ALL SEALANTS ACCORDING TO MANUFACTURERS INSTRUCTIONS.
5. INSTALLATION ANCHORS SHALL BE AS DESIGNATED AND LOCATED AS SHOWN ON THIS INSTALLATION DRAWING. ANCHOR EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES INCLUDING BUT NOT LIMITED TO SHEATHING, UNDERLAYMENT AND SHINGLES.
6. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING. DISSIMILAR METALS OR MATERIALS IN CONTACT WITH PRESSURE TREATED WOOD MUST BE PROTECTED TO PREVENT REACTION.
7. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURERS INSTALLATION INSTRUCTIONS (IF APPLICABLE). ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED IN THE INSTALLATION ANCHOR SCHEDULE ON SHEET 2.


TABLE OF CONTENT	
SHEET	DESCRIPTION
1	GENERAL AND INSTALLATION NOTES
2	ANCHOR SCHEDULE
3	ELEVATION AND ANCHORING LAYOUT
4	INSTALLATIOIN CROSS SECTION AND GLAZING DETAIL
5	BILL OF MATERIALS AND COMPONENTS

Natural Light Energy Systems,
LLC dba Kennedy Skylights
5294 TOWER WAY
SANFORD, FL 32773

MODEL "ICMG" IMPACT CURB MOUNTED GLASS SKYLIGHT ANCHORAGE DETAILS	DATE				
	BY				
	REVISION DESCRIPTION				
	NO.				

DATE: 7/4/2025	DWN BY: RA	CHK BY: n/a	SCALE: NONE
-------------------	---------------	----------------	----------------

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

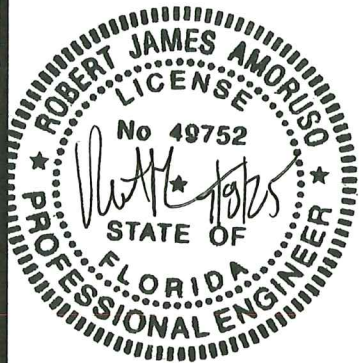

PROJECT#: ACE-2025-111

DWG/REV: KENN0012, Rev 0

SHT: 1 of 5

INSTALLATION ANCHOR SCHEDULE															
ASSEMBLY	FASTENER BOM ITEM NO.	SUBSTRATE	HEAD TYPE	(SIZE)	MANUFACTURER AND/OR SPECIFICATION (2)	MIN. EMBED. (IN)	MIN. EDGE DISTANCE (IN)	MIN. SPACING (IN)	CAPACITIES BASED ON	ANCHOR QUANTITIES AND SPACING					
										EDGE DISTANCE (in)	ON CENTER (O.C.) SPACING (in)	QUANTITY PER SIDE			
SKYLIGHT FRAME TO CURB (ITEM NO. 1) TO CURB (ITEM NO. 7 & 8)	NO. 11	SOLID SAWN LUMBER (1)	HEX, PAN OR TRUSS HD.	NO. 8 X 1-1/4"	ASME B18.6.4 (SDS)	N/A - SCREW LENGTH SPECIFIED	3/4"	3/4"	SG= 0.55 (HVHZ) MIN.	4	14-1/8	4			
									SG= 0.42 (NON-HVHZ) MIN.						
2x5-1/2 WOOD CURB (ITEM NO. 8) AND ALUMINUM CURB FLASHING (ITEM NO. 7) TO ROOF SUBSTRATE	NO. 12	SOLID SAWN LUMBER (1)	HEX, PAN OR TRUSS HD.	NO. 8	ANSI B18.6.1 (WS) ASME B18.6.4 (SDS)	1 1/2"	3/4"	3/4"	SG= 0.55 (HVHZ) MIN.	5-1/4	6-7/8	8			
									SG= 0.42 (NON-HVHZ) MIN.						
	NO. 12	PLYWOOD OR OSB (3) (4)	HEX, PAN OR TRUSS HD.	NO. 8	ASME B18.6.4 (SDS)	SCREW THREADS SHALL PROTRUDE A MIN. OF 1/4" FROM BOTTOM OF ROOF SHEATHING.	1/2"	1/2"	7/16" THICK. PLYWOOD SPECIES GROUP 1 (3) (4)	5-1/4	6-7/8	8			
									7/16" THICK. PLYWOOD SPECIES GROUP 2 (3) (4)				5-1/4	6-1/8	9
									7/16" THICK EXPOSURE 1 OSB SHEATHING GRADE (3) (4)						
	NO. 12	PLYWOOD OR OSB (3) (4)	1/4" ROUND HEAD RING SHANK NAIL	0.099" DIA. MIN.	RING SHANK NAIL	NAIL SHANK SHALL PROTRUDE A MIN. OF 1/4" FROM BOTTOM OF ROOF SHEATHING	1/2"	1/2"	7/16" THICK. PLYWOOD SPECIES GROUP 1 (3) (4)	5-1/4	5-3/8	10			
									7/16" THICK. PLYWOOD SPECIES GROUP 2 (3) (4)						
									7/16" THICK EXPOSURE 1 OSB SHEATHING GRADE (3) (4)						
NOTES	1)	ANCHORS TO BE ANSI B18.6.1 WOOD SCREWS OR ASME B18.6.4 SELF-DRILLING SCREWS WITH MIN. GRADE 2 STRENGTH.													
	2)	WS - WOOD SCREW; SDS - SELF-DRILLING/TAPPING SCREW													
	3)	PLYWOOD SPECIES GROUP 1 OR 2 PER APA VOLUNTARY PRODUCT STANDARD PS 1. OSB SHEATHING GRADE PER APA VOLUNTARY PRODUCT STANDARD PS 2.													
	4)	PLYWOOD OR OSB CAPACITIES ARE BASED ON THE MINIMUMS SHOWN ABOVE. HOWEVER, THESE MINIMUMS MAY NOT NECESSARILY MET FLORIDA BUILDING CODE REQUIREMENTS BASED ON LOCALITY AND/OR OTHER CODE-BASED RESTRICTIONS. USERS MUST ENSURE THAT THE ROOFING SUBSTRATE MEETS THE REQUIREMENTS OF THE FLORIDA BUILDING CODE.													

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 25-0718.04
Expiration Date 09/22/2030
By *[Signature]*
Miami Dade Product Control


Natural Light Energy Systems,
LLC dba Kennedy Skylights
5294 TOWER WAY
SANFORD, FL 32773

MODEL "ICMG" IMPACT CURB MOUNTED GLASS SKYLIGHT ANCHORAGE DETAILS	DATE				
	BY				
	REVISION DESCRIPTION				
	NO.				

DATE: 7/4/2025	DWN BY: RJA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM



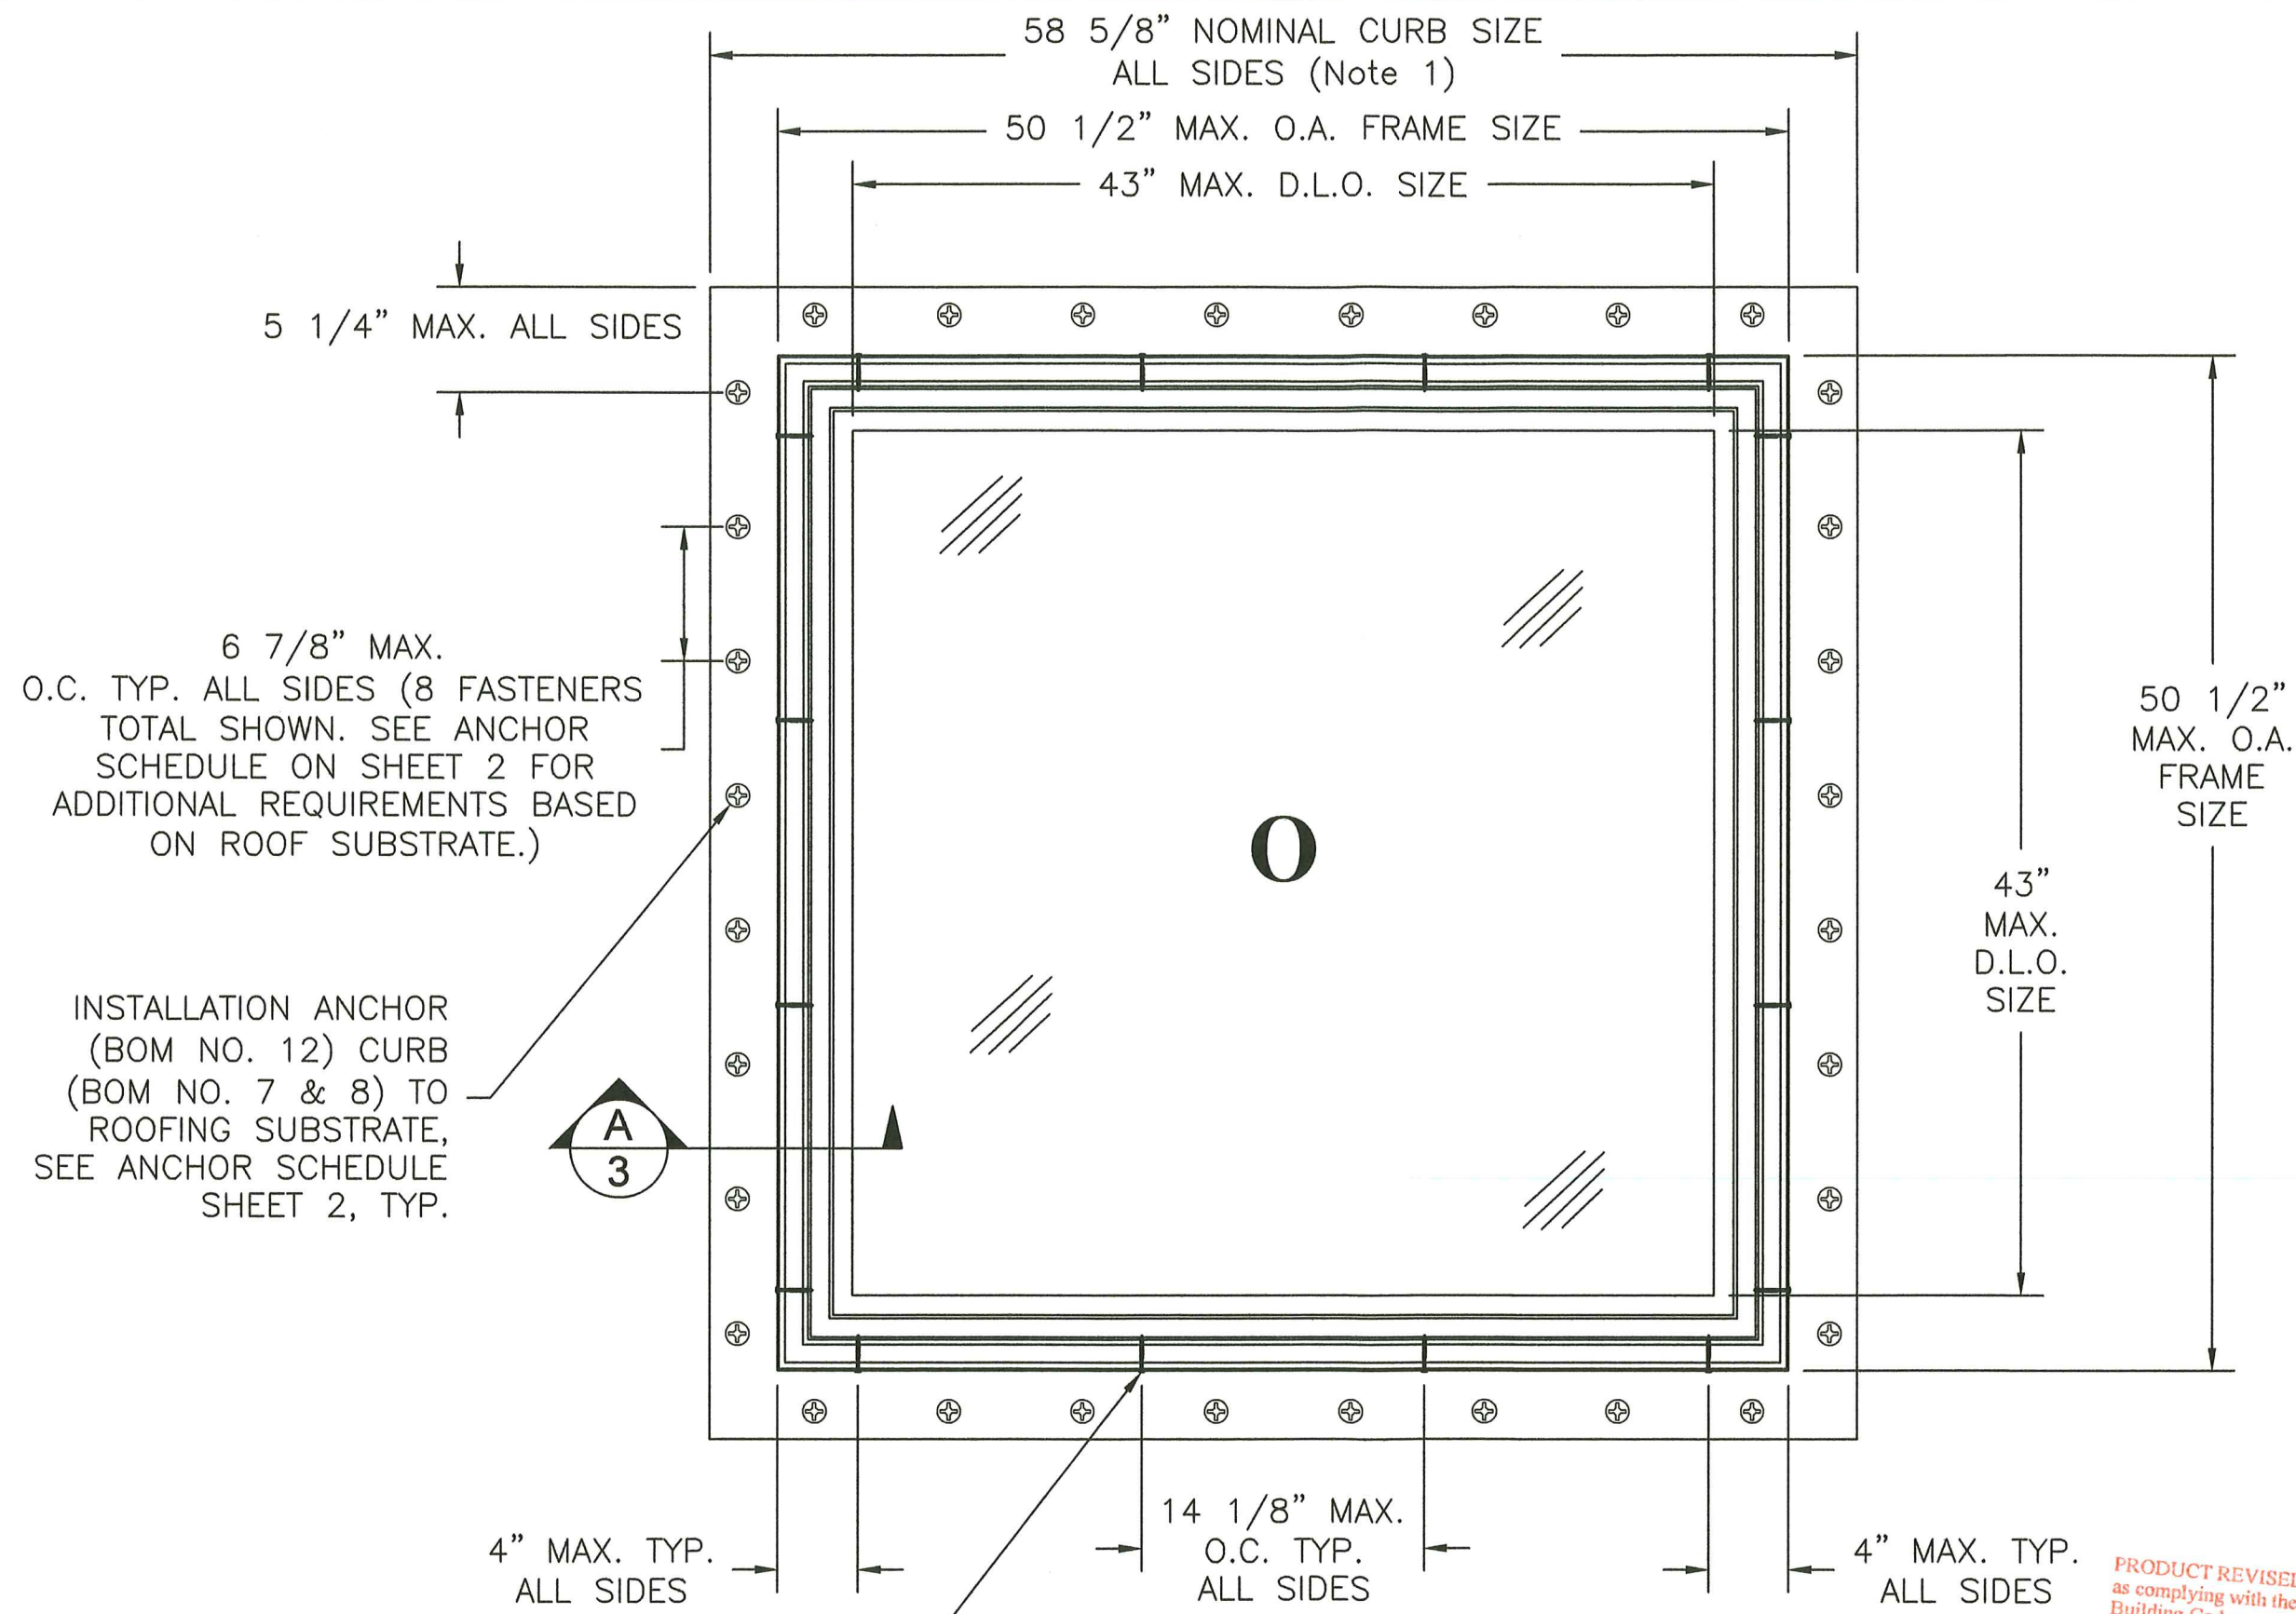

6 7/8" MAX.
O.C. TYP. ALL SIDES (8 FASTENERS
TOTAL SHOWN. SEE ANCHOR
SCHEDULE ON SHEET 2 FOR
ADDITIONAL REQUIREMENTS BASED
ON ROOF SUBSTRATE.)

INSTALLATION ANCHOR
(BOM NO. 12) CURB
(BOM NO. 7 & 8) TO
ROOFING SUBSTRATE,
SEE ANCHOR SCHEDULE
SHEET 2, TYP.



4" MAX. TYP.
ALL SIDES

14 1/8" MAX.
O.C. TYP.
ALL SIDES

4" MAX. TYP.
ALL SIDES

INSTALLATION ANCHOR (BOM NO. 11)
SKYLIGHT FRAME (BOM NO. 1) TO CURB
(BOM NO. 7 & 8), SEE ANCHOR
SCHEDULE SHEET 2, TYP.

MODEL "ICMG" CURB MOUNTED SKYLIGHT

EXTERIOR VIEW

NOTE 1: OUTER CURB
SIZE BASED ON FRAME
SIZE PLUS CURB
FLASHING SIZE AND IS
APPROXIMATE.


PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 25-0718.04
Expiration Date 09/22/2030
By *H. A. [Signature]*
Miami Date Product Control

Natural Light Energy Systems,
LLC dba Kennedy Skylights
5294 TOWER WAY
SANFORD, FL 32773


MODEL "ICMG" IMPACT CURB MOUNTED GLASS SKYLIGHT ANCHORAGE DETAILS	DATE				
	BY				
	REVISION DESCRIPTION				
	NO.				

DATE: 7/4/2025	DWN BY: RJA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------


ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

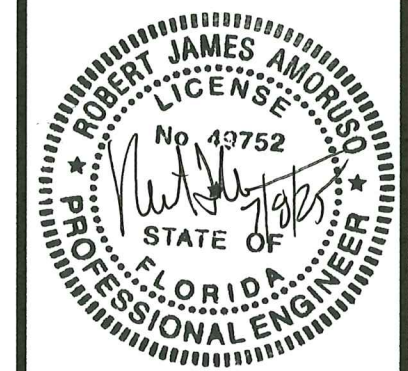

PROJECT#: ACE-2025-111
DWG/REV: KENN0012, Rev 0
SHT: 3 of 5

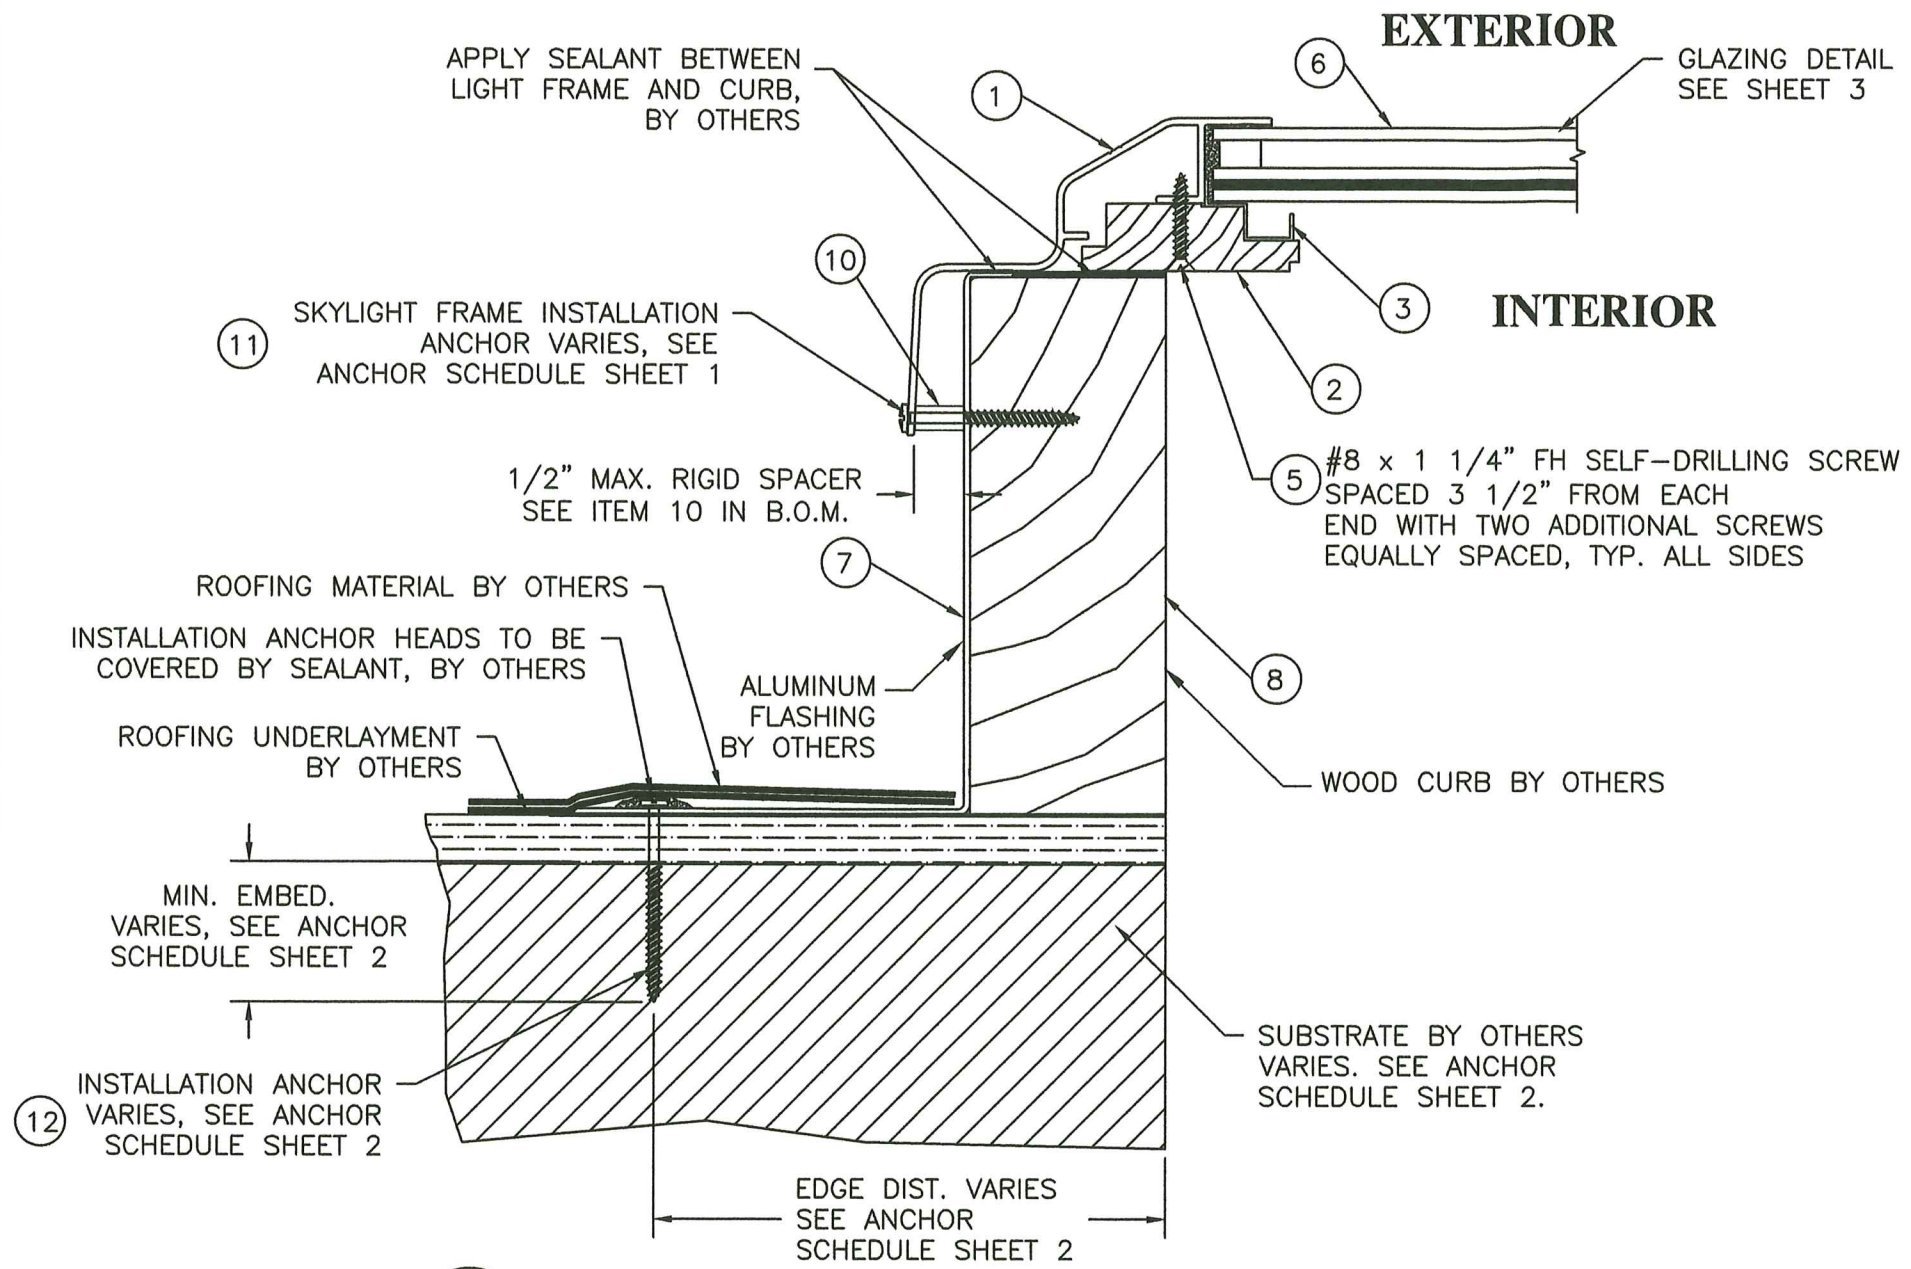

A
3 **INSTALLATION CROSS SECTION**
TYPICAL SHINGLE ROOF SUBSTRATE SHOWN FOR ILLUSTRATIVE PURPOSES

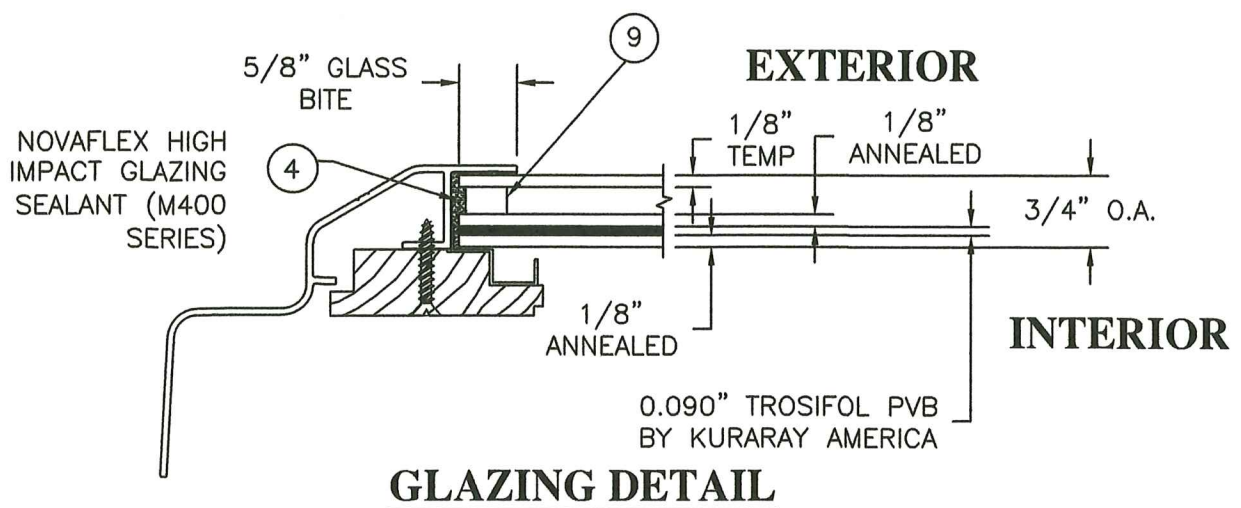

GLAZING DETAIL

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 25-0718.04
Expiration Date 07/22/2030
By *H. A. Amoruso*
Miami Date Product Control


Natural Light Energy Systems,
LLC dba Kennedy Skylights
5294 TOWER WAY
SANFORD, FL 32773

MODEL "ICMG" IMPACT CURB MOUNTED GLASS SKYLIGHT ANCHORAGE DETAILS		DATE	BY	REVISION DESCRIPTION	NO.
DATE:	7/4/2025	DWN BY:	RJA	CHK BY:	n/a
SCALE:	NONE				


ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

PROFESSIONAL ENGINEER
STATE OF FLORIDA
No. 49752
Robert James Amoruso


PROJECT#: ACE-2025-111
DWG/REV: KENN0012, Rev 0
SHT: 4 of 5

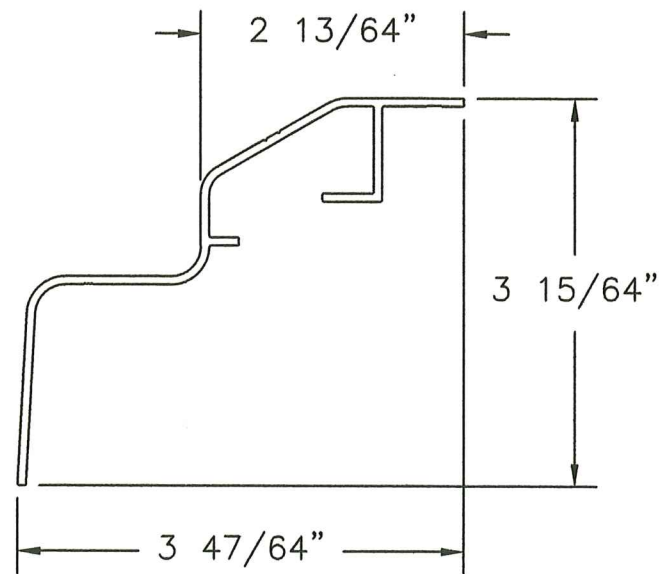


1 **SKYLIGHT FRAME**
EXTRUDED ALUMINUM 6063-T6
0.070" THICK

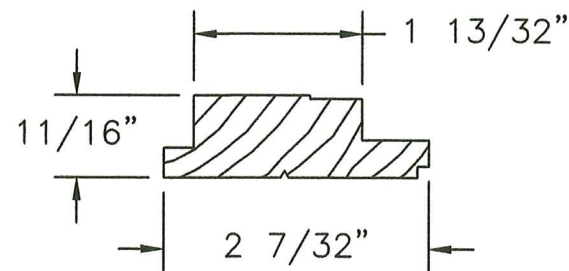


2 **WOOD LITE FRAME**

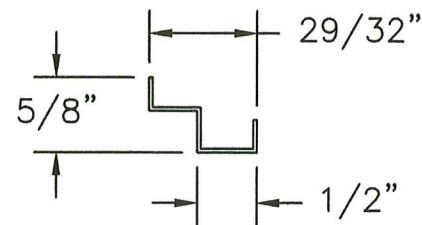

3 **CONDENSATION CHANNEL**
EXTRUDED HIGH TEMP RIGID PVC
0.030" THICK

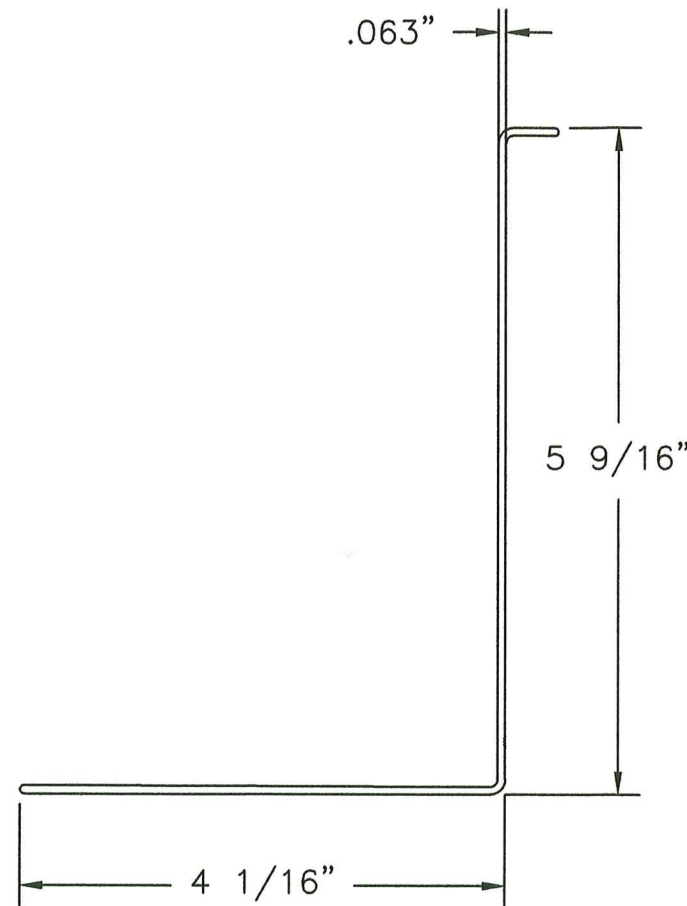

7 **CURB FLASHING**
EXTRUDED ALUMINUM 6063-T6
0.063" THICK

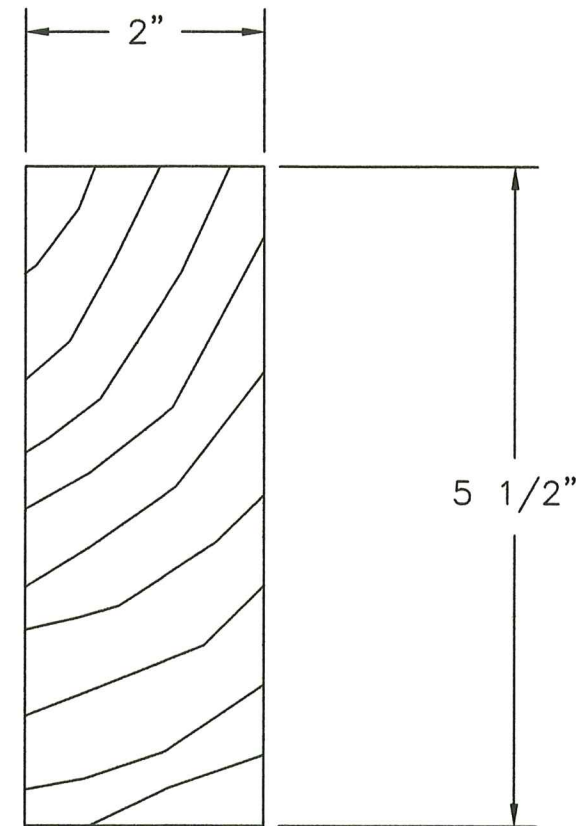

8 **WOOD CURB**

PRODUCT REVISED
as complying with the Florida:
Building Code
Acceptance No. 25-0718.04
Expiration Date 09/22/2030
By *Heidi A. Miller*
Miami Data Product Control

BILL OF MATERIALS


ITEM #	PART #	ITEM DESCRIPTION	MANUFACTURER	MATERIAL
1	FE4701	SKYLIGHT FRAME	MI METALS	ALUM. 6063-T6
2	SM KS-4	WOOD LITE FRAME	STILLWATER	WOOD
3	AK-2474	CONDENSATION CHANNEL	CENTRAL PLASTICS, INC.	HIGH TEMP. PVC
4	M400	NOVAFLEX HIGH IMPACT GLAZING SEALANT	NOVAGARD	STRUCTURAL SILICONE
5		#8 x 1 1/4" FH SELF-DRILLING SCREW		
6		LARGE MISSILE IMPACT GLAZING, SEE SHEET 3		
7		ALUMINUM CURB FLASHING	MI METALS	ALUM. 6063-T6
8		WOOD CURB (2" X 5-1/2")	STILLWATER	WOOD
9		IGU SPACER	ALL METAL	STAINLESS STEEL
10		RIGID SPACER OR SHIM(S)		LOAD BEARING MAT'L
11		SKYLIGHT FRAME TO CURB/ALUMINUM FLASHING	SEE ANCHOR SCHEDULE ON SHEET 2	
12		CURB FLASHING TO ROOF SUBSTRATE	SEE ANCHOR SCHEDULE ON SHEET 2	

Natural Light Energy Systems,
LLC dba Kennedy Skylights
5294 TOWER WAY
SANFORD, FL 32773

MODEL "ICMG" IMPACT CURB MOUNTED GLASS SKYLIGHT ANCHORAGE DETAILS	DATE	BY	REVISION DESCRIPTION	NO.

DATE: 7/4/2025	DWN BY: RIA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

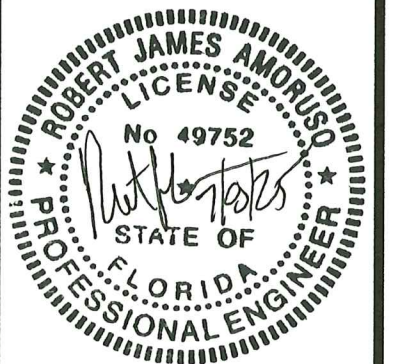

PROJECT#: ACE-2025-111
DWG/REV: KENN0012, Rev 0
SHT: 5 of 5