



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

800.280.2545 | KennedySkylights.com

Beauty, Quality, Affordability
KENNEDY SKYLIGHTS




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Fixed Glass Skylight 2" High Curb

SFG2

GLASS

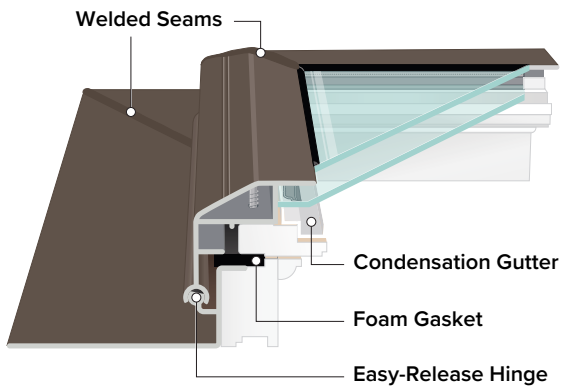

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- .062" extruded aluminum exterior with welded corners
- Integrated 4" flange with pre-drilled screw holes

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass (standard)
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass

APPROVED FOR ALL HURRICANE AND WIND ZONES:

- Impact Glass models (ISFG) have undergone intense water pressure, large missile impact and water infiltration testing to be certified as **Miami-Dade County Approved** for all hurricane and HVHZ wind zones (NOA #25-0718.01)



COLOR CHOICES:


- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- Natural wood interior is optional
- Custom colors and sizes available

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Roof Pitches

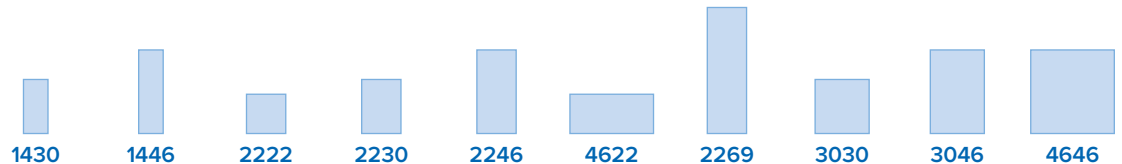

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
1430	14.5" x 30.5"	23" x 39"
1446	14.5" x 46.5"	23" x 55"
2222	22.5" x 22.5"	31" x 31"
2230	22.5" x 30.5"	31" x 39"
2246	22.5" x 46.5"	31" x 55"
4622	46.5" x 22.5"	55" x 31"
2269	22.5" x 69.5"	31" x 78"
3030	30.5" x 30.5"	39" x 39"
3046	30.5" x 46.5"	39" x 55"
4646	46.5" x 46.5"	55" x 55"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - TSFG2	23 lbs
1446 - TSFG2	38 lbs
2222 - TSFG2	29 lbs
2230 - TSFG2	35 lbs
2246 - TSFG2	50 lbs
4622 - TSFG2	50 lbs
2269 - TSFG2	74 lbs
3030 - TSFG2	47 lbs
3046 - TSFG2	61 lbs
4646 - TSFG2	108 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - ISFG2	28 lbs
1446 - ISFG2	45 lbs
2222 - ISFG2	32 lbs
2230 - ISFG2	43 lbs
2246 - ISFG2	54 lbs
4622 - ISFG2	54 lbs
2269 - ISFG2	89 lbs
3030 - ISFG2	52 lbs
3046 - ISFG2	74 lbs
4646 - ISFG2	123 lbs




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Fixed Glass Skylight 4" High Curb

SFG4

GLASS

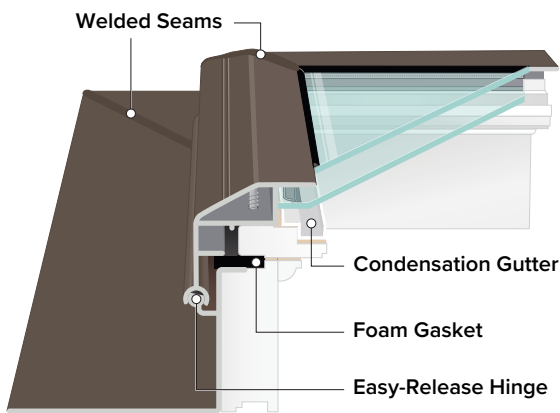

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- .062" extruded aluminum exterior with welded corners
- Integrated 4" flange with pre-drilled screw holes

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled (standard) Glass
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass

APPROVED FOR ALL HURRICANE AND WIND ZONES:

- Impact Glass models (ISFG) have undergone intense water pressure, large missile impact and water infiltration testing to be certified as **Miami-Dade County Approved** for all hurricane and HVHZ wind zones (NOA #25-0718.01)



COLOR CHOICES:

- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- Natural wood interior is optional
- Custom colors and sizes available




WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Roof Pitches

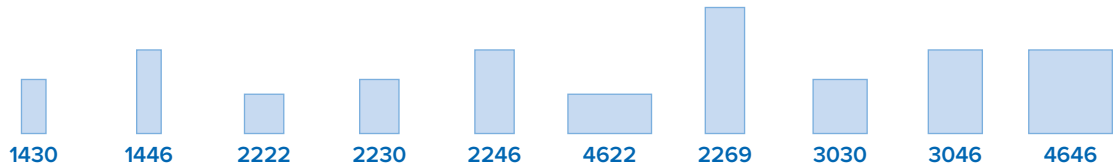

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
1430	14.5" x 30.5"	23" x 39"
1446	14.5" x 46.5"	23" x 55"
2222	22.5" x 22.5"	31" x 31"
2230	22.5" x 30.5"	31" x 39"
2246	22.5" x 46.5"	31" x 55"
4622	46.5" x 22.5"	55" x 31"
2269	22.5" x 69.5"	31" x 78"
3030	30.5" x 30.5"	39" x 39"
3046	30.5" x 46.5"	39" x 55"
4646	46.5" x 46.5"	55" x 55"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - TSFG4	26 lbs
1446 - TSFG4	42 lbs
2222 - TSFG4	35 lbs
2230 - TSFG4	41 lbs
2246 - TSFG4	56 lbs
4622 - TSFG4	56 lbs
2269 - TSFG4	80 lbs
3030 - TSFG4	51 lbs
3046 - TSFG4	68 lbs
4646 - TSFG4	116 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - ISFG4	34 lbs
1446 - ISFG4	49 lbs
2222 - ISFG4	38 lbs
2230 - ISFG4	49 lbs
2246 - ISFG4	63 lbs
4622 - ISFG4	63 lbs
2269 - ISFG4	95 lbs
3030 - ISFG4	60 lbs
3046 - ISFG4	81 lbs
4646 - ISFG4	134 lbs





Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Fixed Glass Skylight 6" High Curb

SFG6

GLASS

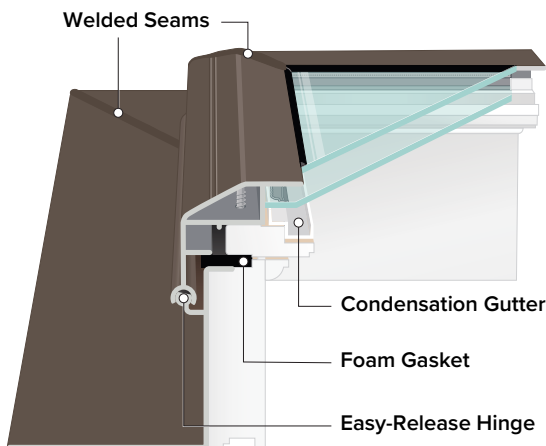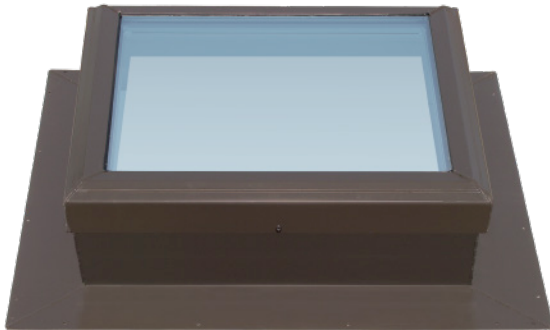

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- .062" extruded aluminum exterior with welded corners
- Integrated 4" flange with pre-drilled screw holes

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled (standard) Glass
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass

APPROVED FOR ALL HURRICANE AND WIND ZONES:

- Impact Glass models (ISFG) have undergone intense water pressure, large missile impact and water infiltration testing to be certified as **Miami-Dade County Approved** for all hurricane and HVHZ wind zones (NOA #25-0718.01)



COLOR CHOICES:

- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- Natural wood interior is optional
- Custom colors and sizes available




WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Roof Pitches

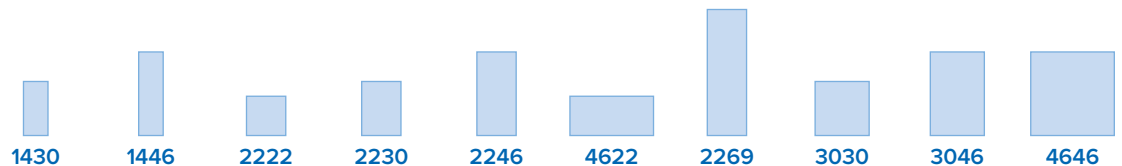

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
1430	14.5" x 30.5"	23" x 39"
1446	14.5" x 46.5"	23" x 55"
2222	22.5" x 22.5"	31" x 31"
2230	22.5" x 30.5"	31" x 39"
2246	22.5" x 46.5"	31" x 55"
4622	46.5" x 22.5"	55" x 31"
2269	22.5" x 69.5"	31" x 78"
3030	30.5" x 30.5"	39" x 39"
3046	30.5" x 46.5"	39" x 55"
4646	46.5" x 46.5"	55" x 55"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - TSFG6	29 lbs
1446 - TSFG6	47 lbs
2222 - TSFG6	38 lbs
2230 - TSFG6	47 lbs
2246 - TSFG6	59 lbs
4622 - TSFG6	59 lbs
2269 - TSFG6	92 lbs
3030 - TSFG6	57 lbs
3046 - TSFG6	78 lbs
4646 - TSFG6	127 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - ISFG6	37 lbs
1446 - ISFG6	52 lbs
2222 - ISFG6	40 lbs
2230 - ISFG6	59 lbs
2246 - ISFG6	76 lbs
4622 - ISFG6	76 lbs
2269 - ISFG6	121 lbs
3030 - ISFG6	74 lbs
3046 - ISFG6	103 lbs
4646 - ISFG6	166 lbs



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Ventilating Glass Skylight 4" High Curb

SFVG4

GLASS



KEY FEATURES:

- High performance glass
- Opens up to 8" and includes an insect screen
- .062" extruded aluminum exterior with welded corners
- Integrated 4" flange with pre-drilled screw holes

QUALITY MATERIALS & OPENING OPTIONS

- Exterior is powder-coated bronze for superior durability
- Pre-finished white wood interior
- Standard model includes a hand crank for opening
- Telescopic Extension Pole available (see Accessories)

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass

COLOR CHOICES:

- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- Natural wood interior is optional
- Custom colors and sizes available

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Welded Seams

Condensation Gutter

Foam Gasket

Easy-Release Hinge



Roof Pitches

2222

2230

2246

3030

3046

4646

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
2222	22.5" x 22.5"	31" x 31"
2230	22.5" x 30.5"	31" x 39"
2246	22.5" x 46.5"	31" x 55"
3030	30.5" x 30.5"	39" x 39"
3046	30.5" x 46.5"	39" x 55"
4646	46.5" x 46.5"	55" x 55"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
2222 - SFVG4	38 lbs
2230 - SFVG4	47 lbs
2246 - SFVG4	59 lbs
3030 - SFVG4	57 lbs
3046 - SFVG4	78 lbs
4646 - SFVG4	127 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
2222 - ISFVG4	40 lbs
2230 - ISFVG4	52 lbs
2246 - ISFVG4	70 lbs
3030 - ISFVG4	63 lbs
3046 - ISFVG4	85 lbs
4646 - ISFVG4	138 lbs

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Ventilating Glass Skylight 6" High Curb

SFVG6

GLASS



KEY FEATURES:

- High performance glass
- Opens up to 8" and includes an insect screen
- .062" extruded aluminum exterior with welded corners
- Integrated 4" flange with pre-drilled screw holes

QUALITY MATERIALS & OPENING OPTIONS

- Exterior is powder-coated bronze for superior durability
- Pre-finished white wood interior
- Standard model includes a hand crank for opening
- Telescopic Extension Pole available (see Accessories)

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass

COLOR CHOICES:


- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- Natural wood interior is optional
- Custom colors and sizes available

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Welded Seams

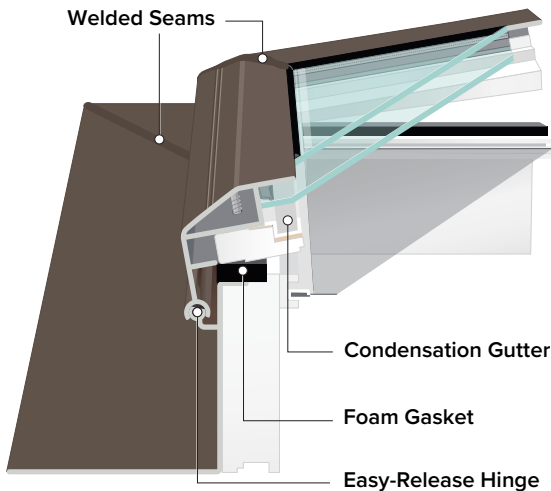

Condensation Gutter

Foam Gasket

Easy-Release Hinge



Roof Pitches

2222

2230

2246

3030

3046

4646

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
2222	22.5" x 22.5"	31" x 31"
2230	22.5" x 30.5"	31" x 39"
2246	22.5" x 46.5"	31" x 55"
3030	30.5" x 30.5"	39" x 39"
3046	30.5" x 46.5"	39" x 55"
4646	46.5" x 46.5"	55" x 55"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
2222 - SFVG6	38 lbs
2230 - SFVG6	47 lbs
2246 - SFVG6	59 lbs
3030 - SFVG6	57 lbs
3046 - SFVG6	78 lbs
4646 - SFVG6	127 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
2222 - ISFVG6	42 lbs
2230 - ISFVG6	61 lbs
2246 - ISFVG6	81 lbs
3030 - ISFVG6	76 lbs
3046 - ISFVG6	105 lbs
4646 - ISFVG6	167 lbs

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Fixed Glass Skylight Replacement Sash

**REPLACEMENT
SASH**

GLASS



KEY FEATURES:

- Quickly and easily replace an old or failing skylight sash
- Sized to replace standard Kennedy SFG sashes
- Meets stringent requirements of the Florida Building Code
- High performance glass
- .062" extruded aluminum exterior with welded corners

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass (standard)
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass





COLOR CHOICES:

- Powder coated bronze exterior
- Custom colors and sizes available



WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials

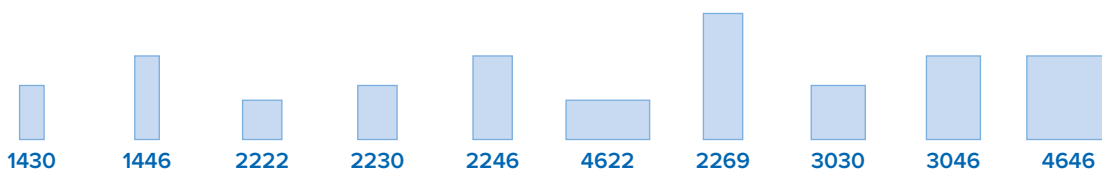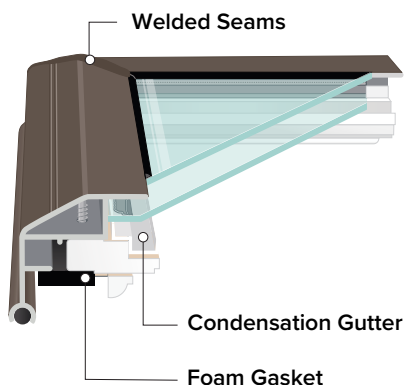

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length
1430	14.5" x 30.5"
1446	14.5" x 46.5"
2222	22.5" x 22.5"
2230	22.5" x 30.5"
2246	22.5" x 46.5"
4622	46.5" x 22.5"
2269	22.5" x 69.5"
3030	30.5" x 30.5"
3046	30.5" x 46.5"
4646	46.5" x 46.5"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - TRG	23 lbs
1446 - TRG	38 lbs
2222 - TRG	29 lbs
2230 - TRG	35 lbs
2246 - TRG	50 lbs
4622 - TRG	50 lbs
2269 - TRG	74 lbs
3030 - TRG	47 lbs
3046 - TRG	61 lbs
4646 - TRG	108 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - IRG	28 lbs
1446 - IRG	45 lbs
2222 - IRG	32 lbs
2230 - IRG	43 lbs
2246 - IRG	54 lbs
4622 - IRG	54 lbs
2269 - IRG	89 lbs
3030 - IRG	52 lbs
3046 - IRG	74 lbs
4646 - IRG	123 lbs




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Curb Mount Fixed Glass Skylight

CMG

GLASS

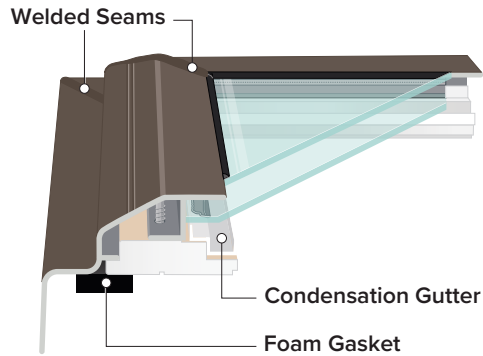

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- High performance glass
- .062" extruded aluminum exterior with welded corners
- Oversized to fit most curbs

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass
- High Impact, Hurricane Rated, LoE-240 Argon Filled Glass



COLOR CHOICES AND OPTIONS:

- Powder coated bronze exterior
- Custom colors and sizes available
- Optional aluminum curb available - mounts on AC or ACW models (see curb section for details)



WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Roof Pitches



SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE CURB [†] Width x Length
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
2269	22.5" x 69.5"	25.5" x 72.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

TEMPERED LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - TCMG	20 lbs
1446 - TCMG	33 lbs
2222 - TCMG	24 lbs
2230 - TCMG	30 lbs
2246 - TCMG	41 lbs
2269 - TCMG	56 lbs
3030 - TCMG	37 lbs
3046 - TCMG	50 lbs
4646 - TCMG	87 lbs

HIGH IMPACT LoE-240 GLASS

MODEL NUMBER	WEIGHT
1430 - ICMG	23 lbs
1446 - ICMG	37 lbs
2222 - ICMG	31 lbs
2230 - ICMG	39 lbs
2246 - ICMG	55 lbs
2269 - ICMG	77 lbs
3030 - ICMG	49 lbs
3046 - ICMG	70 lbs
4646 - ICMG	103 lbs

[†]CMG models are manufactured 1" larger than the outside curb dimension to allow for flashing material.
Example: 2246-CMG actual dimensions = 26.5" x 50.5"

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

High Impact Curb Mount Fixed Glass Skylight

Miami-Dade County Product Control Approved

MD-ICMG

GLASS



KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- High performance glass
- .062" extruded aluminum exterior with welded corners
- Oversized to fit most curbs

GLASS TYPE:

- High Impact, Hurricane Rated, LoE-240 Argon Filled Glass

APPROVED FOR ALL HURRICANE AND WIND ZONES:

- MD-ICMG model has undergone intense water pressure, large missile impact and water infiltration testing to be certified as **Miami-Dade County Approved** for all hurricane and HVHZ wind zones (NOA #25-0718.04)




COLOR CHOICES AND OPTIONS:

- Powder coated bronze exterior
- Custom colors and sizes available
- Optional aluminum curb available - mounts on AC or ACW models (see curb section for details)




WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials

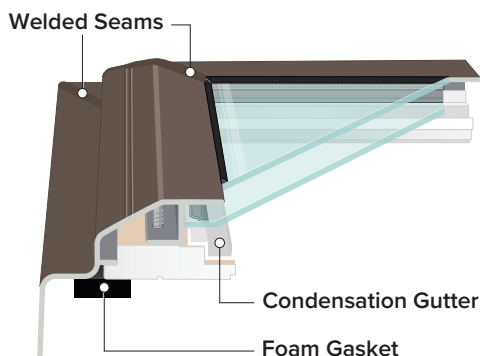

Roof Pitches



SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE CURB [†] Width x Length
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

MD-ICMG SKYLIGHT ONLY

MODEL NUMBER	WEIGHT
1430 - MD-ICMG	23 lbs
1446 - MD-ICMG	37 lbs
2222 - MD-ICMG	31 lbs
2230 - MD-ICMG	39 lbs
2246 - MD-ICMG	55 lbs
3030 - MD-ICMG	49 lbs
3046 - MD-ICMG	70 lbs
4646 - MD-ICMG	103 lbs

MD-ICMG/ACW6 (WITH 6" CURB)

MODEL NUMBER	WEIGHT
1430MD-ICMG/ACW6	44 lbs
1446MD-ICMG/ACW6	69 lbs
2222MD-ICMG/ACW6	58 lbs
2230MD-ICMG/ACW6	70 lbs
2246MD-ICMG/ACW6	94 lbs
3030MD-ICMG/ACW6	81 lbs
3046MD-ICMG/ACW6	108 lbs
4646MD-ICMG/ACW6	148 lbs

[†]MD-ICMG models are manufactured 1" larger than the outside curb dimension to allow for flashing material.
Example: 2246-MD-ICMG actual dimensions = 26.5" x 50.5"

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Extension Pole and Hex Ball Adapter for Vented Glass Skylight

ACCESSORIES

GLASS



CONTROL ROD / MANUAL OPERATION

- Smooth operating control rod allows you to open and close your Vented Skylight with ease
- Telescoping design allows you to reach up to 9 feet so the Venting Skylight can be opened and closed without a ladder
- Collapses down to allow for easy storage

MODEL	PRODUCT DESCRIPTION
POLE1	Telescoping Pole with Hex Ball



HEX BALL ADAPTER / MANUAL OPERATION

- For use with our manual control rod when you have multiple vented skylights
- Attaches directly to the manual control on our vented skylights
- Fits into the operator on the skylight frame

MODEL	PRODUCT DESCRIPTION
HBA	Hex Ball Adapter




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Polycarbonate Domed Skylight

SF

POLYCARBONATE

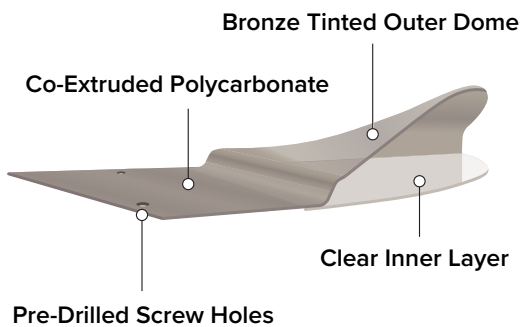

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Co-extruded polycarbonate dome
- Golden bronze tinted outer dome and clear inner panel
- 4" pre-drilled integrated nailing flange
- No curb required
- Mounts between shingles and roof decking
- Energy efficient and blocks harmful UV radiation
- Lightweight - easy to handle and install


POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation



WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

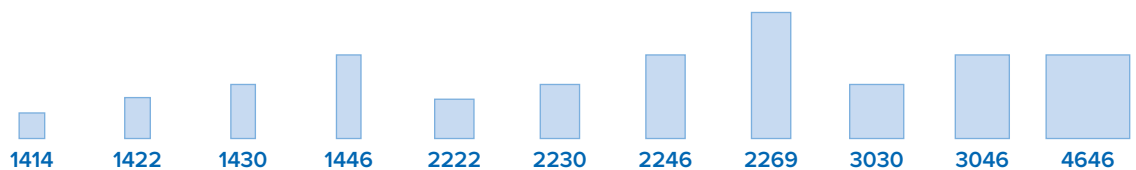

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	SKYLIGHT SIZE Width x Length
1414	14.5" x 14.5"	22" x 22"
1422	14.5" x 22.5"	22" x 30"
1430	14.5" x 30.5"	22" x 38"
1446	14.5" x 46.5"	22" x 54"
2222	22.5" x 22.5"	30" x 30"
2230	22.5" x 30.5"	30" x 38"
2246	22.5" x 46.5"	30" x 54"
2269	22.5" x 69.5"	30" x 77"
3030	30.5" x 30.5"	38" x 38"
3046	30.5" x 46.5"	38" x 54"
4646	46.5" x 46.5"	54" x 54"

SF POLYCARBONATE

MODEL NUMBER	WEIGHT
1414 - SF	4 lbs
1422 - SF	5 lbs
1430 - SF	6 lbs
1446 - SF	8 lbs
2222 - SF	7 lbs
2230 - SF	11 lbs
2246 - SF	13 lbs
2269 - SF	25 lbs
3030 - SF	12 lbs
3046 - SF	17 lbs
4646 - SF	26 lbs

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Curb Mount Polycarbonate Skylight

CM

POLYCARBONATE



KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Co-extruded polycarbonate dome
- Golden bronze tinted outer dome and clear inner panel
- Mounts on existing curb, site-built curb, Kennedy AC or ACW Curbs (see curb section) - hardware included
- Pre-drilled screw holes for fast and easy installation
- Energy efficient and blocks harmful UV radiation
- Lightweight - easy to handle



POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation



WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

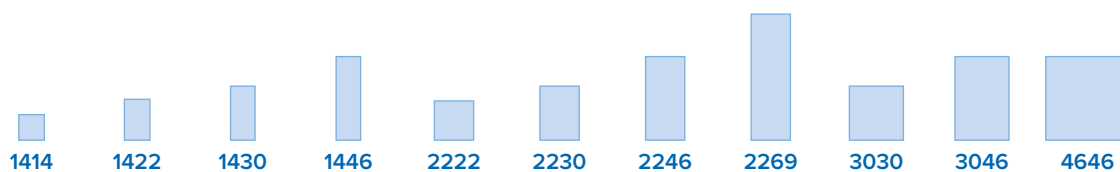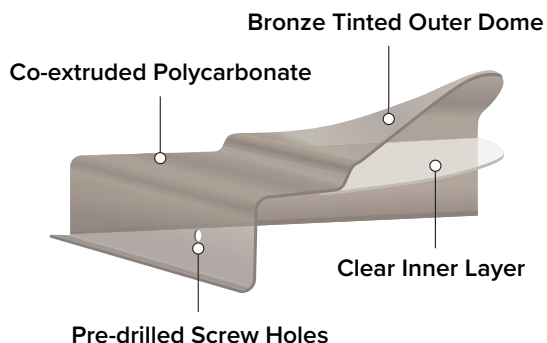

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE CURB [†] Width x Length
1414	14.5" x 14.5"	17.5" x 17.5"
1422	14.5" x 22.5"	17.5" x 25.5"
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
2269	22.5" x 69.5"	25.5" x 72.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

CM POLYCARBONATE

MODEL NUMBER	WEIGHT
1414 - CM	4 lbs
1422 - CM	5 lbs
1430 - CM	6 lbs
1446 - CM	8 lbs
2222 - CM	7 lbs
2230 - CM	11 lbs
2246 - CM	13 lbs
2269 - CM	25 lbs
3030 - CM	12 lbs
3046 - CM	17 lbs
4646 - CM	26 lbs

[†]CM models are manufactured 1" larger than the outside curb dimension to allow for flashing material.
Example: 2246-CM actual dimensions = 26.5" x 50.5"

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Curb Mount Aluminum Polycarbonate Skylight

CMA

POLYCARBONATE




KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Co-extruded polycarbonate dome
- Features a powder coated bronze aluminum deco frame for added durability
- Golden bronze tinted outer dome and clear inner panel
- Mounts on existing curb, site-built curb, Kennedy AC or ACW Curbs (see curb section) - hardware included
- Pre-drilled screw holes for fast and easy installation
- Energy efficient and blocks harmful UV radiation
- Lightweight - easy to handle

POLYCARBONATE ADVANTAGES:


- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation

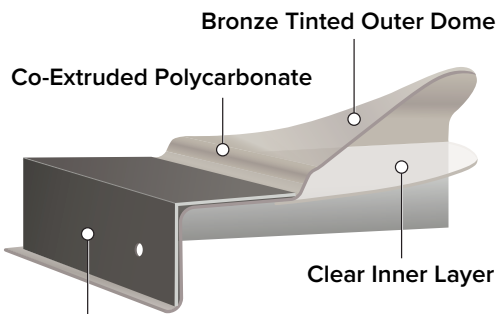

Aluminum Deco Frame

WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

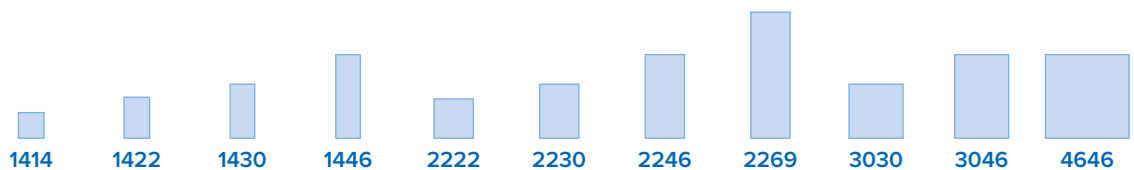

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE CURB* Width x Length
1414	14.5" x 14.5"	17.5" x 17.5"
1422	14.5" x 22.5"	17.5" x 25.5"
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
2269	22.5" x 69.5"	25.5" x 72.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

CMA POLYCARBONATE

MODEL NUMBER	WEIGHT
1414 - CMA	5 lbs
1422 - CMA	6 lbs
1430 - CMA	8 lbs
1446 - CMA	10 lbs
2222 - CMA	9 lbs
2230 - CMA	13 lbs
2246 - CMA	15 lbs
2269 - CMA	28 lbs
3030 - CMA	14 lbs
3046 - CMA	20 lbs
4646 - CMA	30 lbs

*CMA models are manufactured 1" larger than the outside curb dimension to allow for flashing material.
Example: 2246-CMA actual dimensions = 26.5" x 50.5"

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Hurricane Approved Curb Mount Aluminum Polycarbonate Skylight

HCMA

POLYCARBONATE



KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Approved for use in high velocity hurricane zones
- Co-extruded polycarbonate dome
- Perimeter framed by hurricane rated, welded aluminum ring
- Golden bronze tinted outer dome and clear inner panel
- Mounts on existing curb, site-built curb, Kennedy AC or ACW Curbs (see curb section) - hardware included
- Pre-drilled screw holes for fast and easy installation
- Energy efficient and blocks harmful UV radiation
- Lightweight - easy to handle





POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation



WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

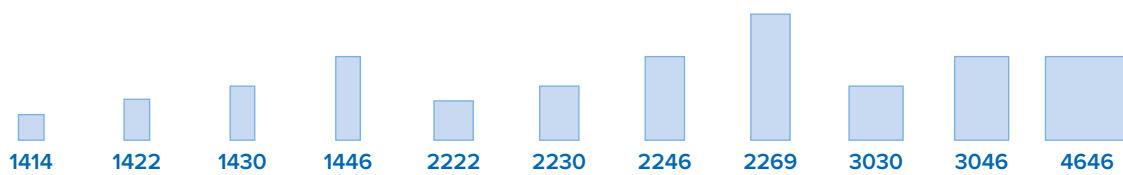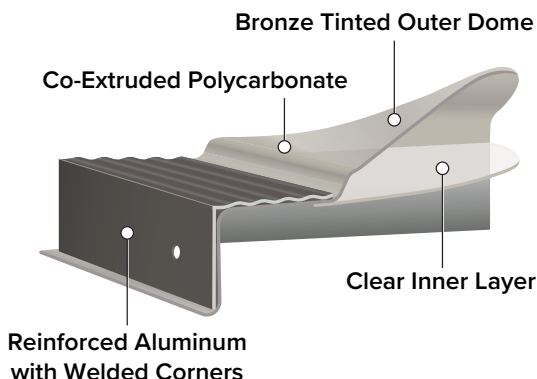

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE CURB [†] Width x Length
1414	14.5" x 14.5"	17.5" x 17.5"
1422	14.5" x 22.5"	17.5" x 25.5"
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
2269	22.5" x 69.5"	25.5" x 72.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

HCMA POLYCARBONATE

MODEL NUMBER	WEIGHT
1414 - HCMA	6 lbs
1422 - HCMA	7 lbs
1430 - HCMA	9 lbs
1446 - HCMA	11 lbs
2222 - HCMA	9 lbs
2230 - HCMA	14 lbs
2246 - HCMA	16 lbs
2269 - HCMA	30 lbs
3030 - HCMA	15 lbs
3046 - HCMA	21 lbs
4646 - HCMA	31 lbs

[†]HCMA models are manufactured 1" larger than the outside curb dimension to allow for flashing material.
Example: 2246-HCMA actual dimensions = 26.5" x 50.5"

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Hurricane Approved Curb Mount Aluminum Polycarbonate Skylight

Miami-Dade County Product Control Approved

MD-HCMA

POLYCARBONATE

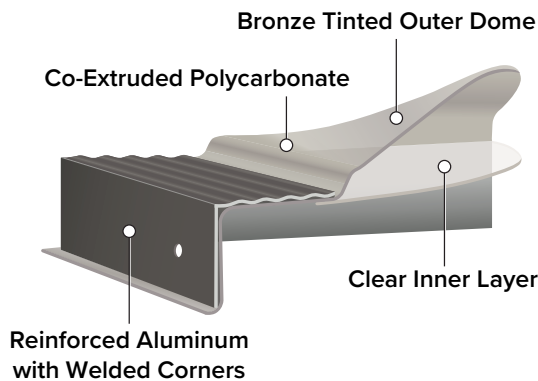

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Approved for use in high velocity hurricane zones
- Co-extruded polycarbonate dome
- Perimeter framed by hurricane rated, welded aluminum ring
- Golden bronze tinted outer dome and clear inner panel
- Mounts on existing curb, site-built curb, Kennedy AC or ACW Curbs (see curb section) - hardware included
- Pre-drilled screw holes for fast and easy installation

APPROVED FOR ALL HURRICANE AND WIND ZONES:

- MD-HCMA has undergone intense water pressure, large missile impact and water infiltration testing to be certified as **Miami-Dade County Approved** for all hurricane and HVHZ wind zones (NOA #25-0718.03)




POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- Resists effects of solar UV radiation



WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

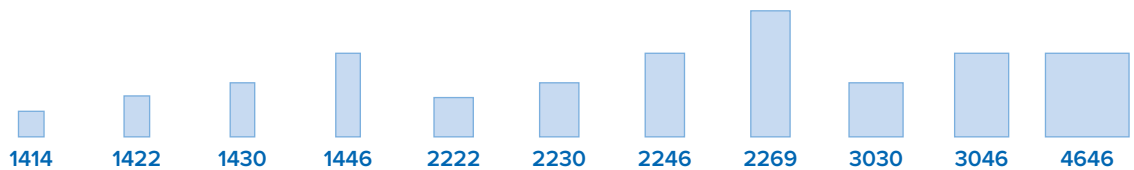

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE CURB Width x Length
1414	14.5" x 14.5"	17.5" x 17.5"
1422	14.5" x 22.5"	17.5" x 25.5"
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
2269	22.5" x 69.5"	25.5" x 72.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

MD-HCMA SKYLIGHT ONLY

MODEL NUMBER	WEIGHT
1414 - MD-HCMA	6 lbs
1422 - MD-HCMA	7 lbs
1430 - MD-HCMA	9 lbs
1446 - MD-HCMA	11 lbs
2222 - MD-HCMA	9 lbs
2230 - MD-HCMA	14 lbs
2246 - MD-HCMA	16 lbs
2269 - MD-HCMA	30 lbs
3030 - MD-HCMA	15 lbs
3046 - MD-HCMA	21 lbs
4646 - MD-HCMA	31 lbs

MD-HCMA/ACW6 (WITH 6" CURB)

MODEL NUMBER	WEIGHT
1414MD-HCMA/ACW6	21 lbs
1422MD-HCMA/ACW6	25 lbs
1430MD-HCMA/ACW6	30 lbs
1446MD-HCMA/ACW6	43 lbs
2222MD-HCMA/ACW6	36 lbs
2230MD-HCMA/ACW6	45 lbs
2246MD-HCMA/ACW6	55 lbs
2269MD-HCMA/ACW6	76 lbs
3030MD-HCMA/ACW6	47 lbs
3046MD-HCMA/ACW6	59 lbs
4646MD-HCMA/ACW6	76 lbs

*MD-HCMA models are manufactured 1" larger than the outside curb dimension to allow for flashing material.
Example: 2246-MD-HCMA actual dimensions = 26.5" x 50.5"

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Aluminum Skylight / Styrofoam Liner for New Construction Applications

SFA

POLYCARBONATE



KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Co-extruded polycarbonate dome
- Energy-efficient Styrofoam liner
- Golden bronze tinted outer dome and clear inner panel
- Powder coated bronze exterior
- .062" extruded aluminum exterior with welded corners
- Moisture resistant, full-surround foam gasket
- 4" pre-drilled integrated nailing flange
- Energy efficient and blocks harmful UV radiation
- Lightweight - easy to handle

POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation




AVAILABLE OPTIONS:


- Custom exterior colors available

WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

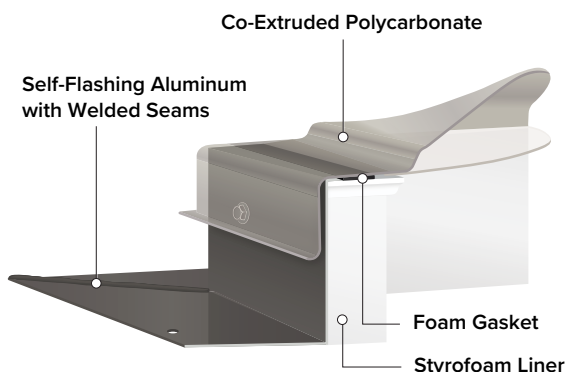

Roof Pitches

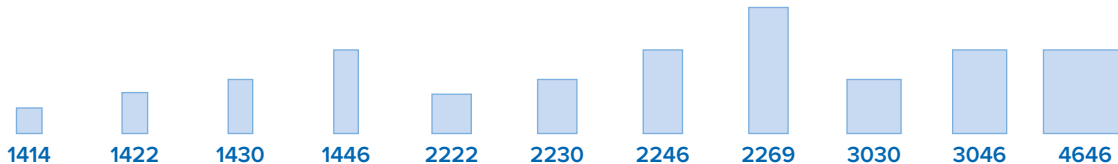

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
1414	14.5" x 14.5"	25.5" x 25.5"
1422	14.5" x 22.5"	25.5" x 33.5"
1430	14.5" x 30.5"	25.5" x 41.5"
1446	14.5" x 46.5"	25.5" x 57.5"
2222	22.5" x 22.5"	33.5" x 33.5"
2230	22.5" x 30.5"	33.5" x 41.5"
2246	22.5" x 46.5"	33.5" x 57.5"
2269	22.5" x 69.5"	33.5" x 80.5"
3030	30.5" x 30.5"	41.5" x 41.5"
3046	30.5" x 46.5"	41.5" x 57.5"
4646	46.5" x 46.5"	57.5" x 57.5"

SFA WITH 4" CURB

MODEL NUMBER	WEIGHT
1414 - SFA4	10 lbs
1422 - SFA4	13 lbs
1430 - SFA4	18 lbs
1446 - SFA4	22 lbs
2222 - SFA4	12 lbs
2230 - SFA4	16 lbs
2246 - SFA4	20 lbs
2269 - SFA4	26 lbs
3030 - SFA4	28 lbs
3046 - SFA4	30 lbs
4646 - SFA4	50 lbs

SFA WITH 6" CURB

MODEL NUMBER	WEIGHT
1414 - SFA6	12 lbs
1422 - SFA6	15 lbs
1430 - SFA6	20 lbs
1446 - SFA6	25 lbs
2222 - SFA6	16 lbs
2230 - SFA6	21 lbs
2246 - SFA6	23 lbs
2269 - SFA6	31 lbs
3030 - SFA6	30 lbs
3046 - SFA6	34 lbs
4646 - SFA6	56 lbs



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Self-Flashing Aluminum Skylight / White Wood Interior for Re-roofing Applications

SFAW

POLYCARBONATE



KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Co-extruded polycarbonate dome
- Pre-finished white poplar wood interior
- Golden bronze tinted outer dome and clear inner panel
- Powder coated bronze exterior
- .062" extruded aluminum exterior with welded corners
- Moisture resistant, full-surround foam gasket
- 4" pre-drilled integrated nailing flange
- Energy efficient and blocks harmful UV radiation
- Lightweight - easy to handle

POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation




AVAILABLE OPTIONS:


- Custom exterior colors available

WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

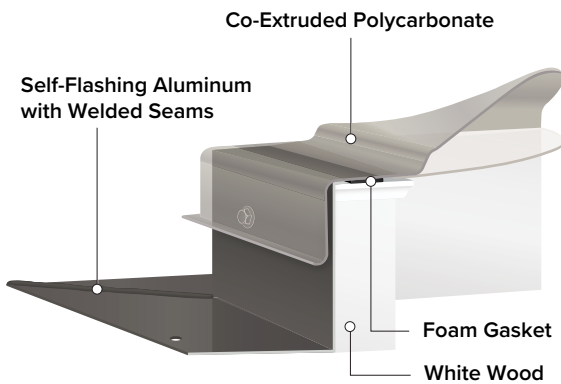

Roof Pitches

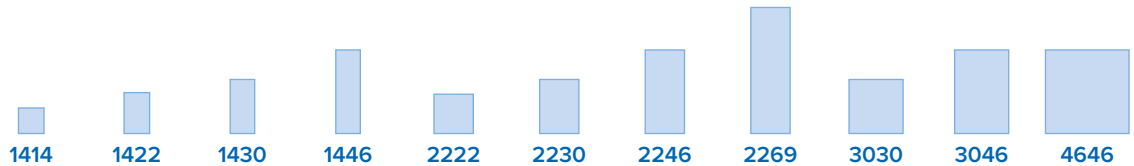

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
1414	14.5" x 14.5"	25.5" x 25.5"
1422	14.5" x 22.5"	25.5" x 33.5"
1430	14.5" x 30.5"	25.5" x 41.5"
1446	14.5" x 46.5"	25.5" x 57.5"
2222	22.5" x 22.5"	33.5" x 33.5"
2230	22.5" x 30.5"	33.5" x 41.5"
2246	22.5" x 46.5"	33.5" x 57.5"
2269	22.5" x 69.5"	33.5" x 80.5"
3030	30.5" x 30.5"	41.5" x 41.5"
3046	30.5" x 46.5"	41.5" x 57.5"
4646	46.5" x 46.5"	57.5" x 57.5"

SFAW WITH 4" CURB

MODEL NUMBER	WEIGHT
1414 - SFAW4	15 lbs
1422 - SFAW4	18 lbs
1430 - SFAW4	22 lbs
1446 - SFAW4	29 lbs
2222 - SFAW4	22 lbs
2230 - SFAW4	29 lbs
2246 - SFAW4	32 lbs
2269 - SFAW4	38 lbs
3030 - SFAW4	34 lbs
3046 - SFAW4	40 lbs
4646 - SFAW4	54 lbs

SFAW WITH 6" CURB

MODEL NUMBER	WEIGHT
1414 - SFAW6	17 lbs
1422 - SFAW6	21 lbs
1430 - SFAW6	26 lbs
1446 - SFAW6	34 lbs
2222 - SFAW6	26 lbs
2230 - SFAW6	33 lbs
2246 - SFAW6	38 lbs
2269 - SFAW6	46 lbs
3030 - SFAW6	40 lbs
3046 - SFAW6	47 lbs
4646 - SFAW6	62 lbs

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Hurricane Approved Self-Flashing Aluminum Skylight / Wood Interior

Miami-Dade County Product Control Approved

HSFAW

POLYCARBONATE

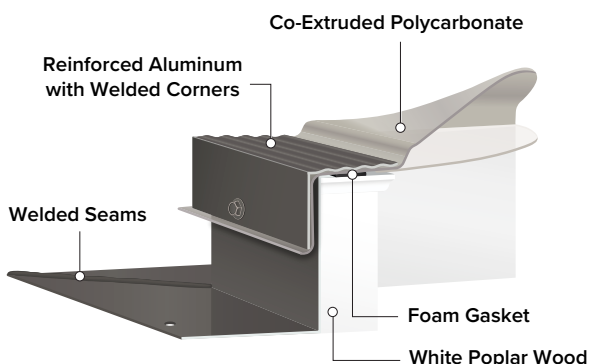

KEY FEATURES:

- Meets stringent requirements of the Florida Building Code
- Co-extruded polycarbonate dome
- Perimeter framed by hurricane rated, welded aluminum ring
- Pre-finished white poplar wood interior
- Golden bronze tinted outer dome and clear inner panel
- .062" extruded aluminum exterior with welded corners
- Powder coated bronze exterior - custom colors available
- Moisture resistant, full-surround foam gasket
- 4" pre-drilled integrated nailing flange

APPROVED FOR ALL HURRICANE AND WIND ZONES:

- HSFAW has undergone intense water pressure, large missile impact and water infiltration testing to be certified as **Miami-Dade County Approved** for all hurricane and HVHZ wind zones (NOA #25-0718.02)



POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- High clarity and light transmission
- Resists effects of solar UV radiation




WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials



Roof Pitches

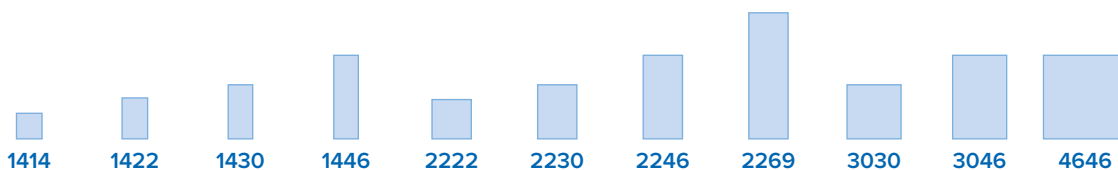

SKYLIGHT SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length
1414	14.5" x 14.5"	25.5" x 25.5"
1422	14.5" x 22.5"	25.5" x 33.5"
1430	14.5" x 30.5"	25.5" x 41.5"
1446	14.5" x 46.5"	25.5" x 57.5"
2222	22.5" x 22.5"	33.5" x 33.5"
2230	22.5" x 30.5"	33.5" x 41.5"
2246	22.5" x 46.5"	33.5" x 57.5"
2269	22.5" x 69.5"	33.5" x 80.5"
3030	30.5" x 30.5"	41.5" x 41.5"
3046	30.5" x 46.5"	41.5" x 57.5"
4646	46.5" x 46.5"	57.5" x 57.5"

HSFAW WITH 4" CURB

MODEL NUMBER	WEIGHT
1414 - HSFAW4	15 lbs
1422 - HSFAW4	20 lbs
1430 - HSFAW4	24 lbs
1446 - HSFAW4	32 lbs
2222 - HSFAW4	25 lbs
2230 - HSFAW4	32 lbs
2246 - HSFAW4	36 lbs
2269 - HSFAW4	43 lbs
3030 - HSFAW4	37 lbs
3046 - HSFAW4	44 lbs
4646 - HSFAW4	59 lbs

HSFAW WITH 6" CURB

MODEL NUMBER	WEIGHT
1414 - HSFAW6	17 lbs
1422 - HSFAW6	21 lbs
1430 - HSFAW6	26 lbs
1446 - HSFAW6	35 lbs
2222 - HSFAW6	26 lbs
2230 - HSFAW6	33 lbs
2246 - HSFAW6	39 lbs
2269 - HSFAW6	47 lbs
3030 - HSFAW6	41 lbs
3046 - HSFAW6	48 lbs
4646 - HSFAW6	63 lbs

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Non-Insulated Pre-Finished Aluminum Curb 4" or 6" High Curb

AC

CURBS

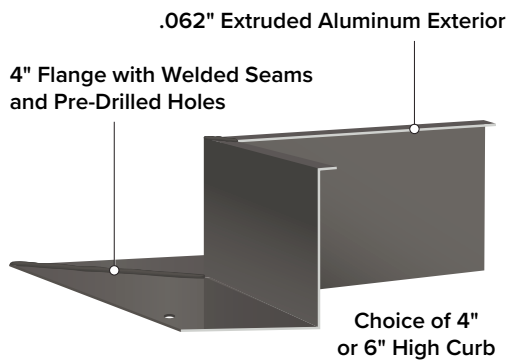

KEY FEATURES:

- Pre-finished curb for all roof pitches
- Choice of 4" or 6" high curb
- Powder coated bronze exterior
- .062" extruded aluminum exterior with welded corners
- Pre-drilled screw holes for fast and easy installation
- Individually boxed

PRE-BUILT CURB ADVANTAGES:

- Saves time and simplifies any skylight installation
- Superior to galvanized metal or site-built curbs
- Works with many brands of plastic and glass skylights designed for curbs
- Non-insulated curb ideal for replacing flashing on existing skylights

AVAILABLE OPTIONS:

- Custom paint colors and sizes available

FITS THESE KENNEDY MODELS:


- CMG, MD-ICMG, CM, CMA, HCMA and MD-HCMA skylights

WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials



Roof Pitches

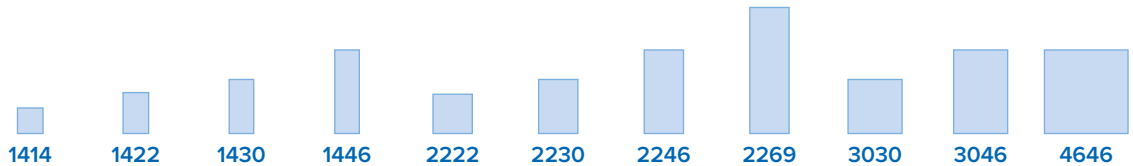

CURB SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length	OUTSIDE CURB Width x Length
1414	14.5" x 14.5"	25.5" x 25.5"	17.5" x 17.5"
1422	14.5" x 22.5"	25.5" x 33.5"	17.5" x 25.5"
1430	14.5" x 30.5"	25.5" x 41.5"	17.5" x 33.5"
1446	14.5" x 46.5"	25.5" x 57.5"	17.5" x 49.5"
2222	22.5" x 22.5"	33.5" x 33.5"	25.5" x 25.5"
2230	22.5" x 30.5"	33.5" x 41.5"	25.5" x 33.5"
2246	22.5" x 46.5"	33.5" x 57.5"	25.5" x 49.5"
2269	22.5" x 69.5"	33.5" x 80.5"	25.5" x 72.5"
3030	30.5" x 30.5"	41.5" x 41.5"	33.5" x 33.5"
3046	30.5" x 46.5"	41.5" x 57.5"	33.5" x 49.5"
4646	46.5" x 46.5"	57.5" x 57.5"	49.5" x 49.5"

AC WITH 4" CURB

MODEL NUMBER	WEIGHT
1414 - AC4	7 lbs
1422 - AC4	8 lbs
1430 - AC4	11 lbs
1446 - AC4	13 lbs
2222 - AC4	9 lbs
2230 - AC4	12 lbs
2246 - AC4	14 lbs
2269 - AC4	20 lbs
3030 - AC4	16 lbs
3046 - AC4	12 lbs
4646 - AC4	23 lbs

AC WITH 6" CURB

MODEL NUMBER	WEIGHT
1414 - AC6	10 lbs
1422 - AC6	12 lbs
1430 - AC6	14 lbs
1446 - AC6	18 lbs
2222 - AC6	15 lbs
2230 - AC6	18 lbs
2246 - AC6	23 lbs
2269 - AC6	30 lbs
3030 - AC6	22 lbs
3046 - AC6	26 lbs
4646 - AC6	34 lbs

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

White Wood Interior Pre-Finished Aluminum Curb 4" or 6" High Curb

ACW

CURBS



KEY FEATURES:

- Pre-finished curb for all roof pitches
- Choice of 4" or 6" high curb
- Powder coated bronze exterior
- Pre-finished white wood interior
- .062" extruded aluminum exterior with welded corners
- Pre-drilled screw holes for fast and easy installation
- Individually boxed

PRE-BUILT CURB ADVANTAGES:

- Saves time and simplifies any skylight installation
- Superior to galvanized metal or site-built curbs
- Works with many brands of plastic and glass skylights that are designed for curbs

AVAILABLE OPTIONS:


- Custom paint colors and sizes available
- Natural wood interior available

FITS THESE KENNEDY MODELS:


- CMG, MD-ICMG, CM, CMA, HCMA and MD-HCMA skylights

WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials

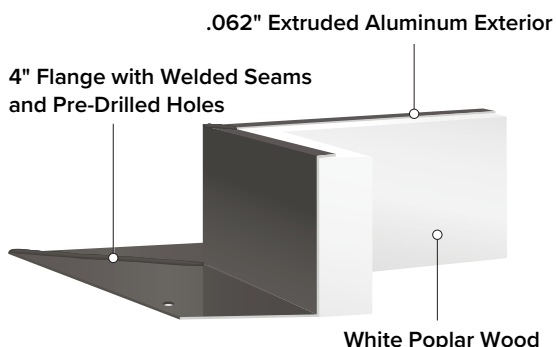

Roof Pitches

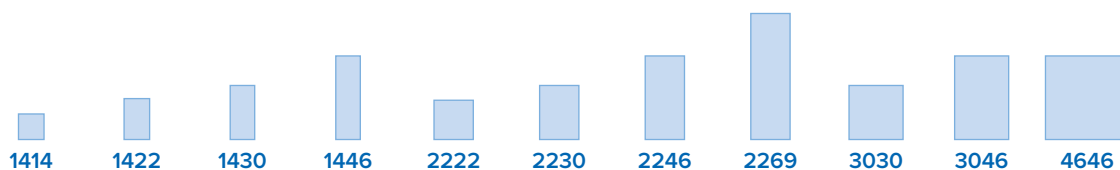

CURB SIZES

SIZE CODE	ROUGH OPENING Width x Length	OUTSIDE FLANGE Width x Length	OUTSIDE CURB Width x Length
1414	14.5" x 14.5"	25.5" x 25.5"	17.5" x 17.5"
1422	14.5" x 22.5"	25.5" x 33.5"	17.5" x 25.5"
1430	14.5" x 30.5"	25.5" x 41.5"	17.5" x 33.5"
1446	14.5" x 46.5"	25.5" x 57.5"	17.5" x 49.5"
2222	22.5" x 22.5"	33.5" x 33.5"	25.5" x 25.5"
2230	22.5" x 30.5"	33.5" x 41.5"	25.5" x 33.5"
2246	22.5" x 46.5"	33.5" x 57.5"	25.5" x 49.5"
2269	22.5" x 69.5"	33.5" x 80.5"	25.5" x 72.5"
3030	30.5" x 30.5"	41.5" x 41.5"	33.5" x 33.5"
3046	30.5" x 46.5"	41.5" x 57.5"	33.5" x 49.5"
4646	46.5" x 46.5"	57.5" x 57.5"	49.5" x 49.5"

ACW WITH 4" CURB

MODEL NUMBER	WEIGHT
1414 - ACW4	13 lbs
1422 - ACW4	16 lbs
1430 - ACW4	19 lbs
1446 - ACW4	27 lbs
2222 - ACW4	24 lbs
2230 - ACW4	27 lbs
2246 - ACW4	34 lbs
2269 - ACW4	40 lbs
3030 - ACW4	27 lbs
3046 - ACW4	31 lbs
4646 - ACW4	39 lbs

ACW WITH 6" CURB

MODEL NUMBER	WEIGHT
1414 - ACW6	15 lbs
1422 - ACW6	18 lbs
1430 - ACW6	21 lbs
1446 - ACW6	32 lbs
2222 - ACW6	27 lbs
2230 - ACW6	31 lbs
2246 - ACW6	39 lbs
2269 - ACW6	46 lbs
3030 - ACW6	32 lbs
3046 - ACW6	38 lbs
4646 - ACW6	45 lbs



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Pitched Roof, Flat Roof and Curb Mount Tubular Skylights

MODELS

TUBULAR



PITCHED ROOF TUBULAR SKYLIGHT KIT

- Available in 3 sizes: 10", 13" and 18"
- Kit includes all components and hardware for a 4' installation
- Powder coated black, bronze or mill finish aluminum flashing
- Choice of prismatic or soft white diffuser - curved or flat
- Fits all roof slopes and roof types
- Florida Building Code Approved and HVHZ Compliant
- Limited Lifetime Warranty

Black	MODEL Bronze	Mill Finish	PRODUCT DESCRIPTION
10KPPBL	10KPPBR	10KPP	10" Pitched Roof Kit (output up to 150 sf)
13KPPBL	13KPPBR	13KPP	13" Pitched Roof Kit (output up to 300 sf)
18KPPBL	18KPPBR	18KPP	18" Pitched Roof Kit (output up to 500 sf)



FLAT ROOF TUBULAR SKYLIGHT KIT

- Available in 4 sizes: 10", 13", 18" and 21"
- Kit includes all components and hardware for a 4' installation
- Powder coated black, bronze or mill finish aluminum flashing
- Choice of prismatic or soft white diffuser - curved or flat
- Fits all flat roofs and roof types
- Florida Building Code Approved and HVHZ Compliant
- Limited Lifetime Warranty

Black	MODEL Bronze	Mill Finish	PRODUCT DESCRIPTION
10KFFBL	10KFFBR	10KFF	10" Flat Roof Kit (output up to 150 sf)
13KFFBL	13KFFBR	13KFF	13" Flat Roof Kit (output up to 300 sf)
18KFFBL	18KFFBR	18KFF	18" Flat Roof Kit (output up to 500 sf)
N/A	N/A	21KFF	21" Flat Roof Kit (output up to 700 sf)



CURB MOUNT TUBULAR SKYLIGHT KIT

- Available in 4 sizes: 10", 13", 18" and 21"
- Kit includes all components and hardware for a 4' installation
- Powder coated black, bronze or mill finish aluminum flashing
- Choice of prismatic or soft white diffuser - curved or flat
- Installs over pre-built curb
- Florida Building Code Approved and HVHZ Compliant
- Limited Lifetime Warranty

Black	MODEL Bronze	Mill Finish	PRODUCT DESCRIPTION
10KFCMBL	10KFCMBR	10KFCM	10" Curb Mount Kit (output up to 150 sf)
13KFCMBL	13KFCMBR	13KFCM	13" Curb Mount Kit (output up to 300 sf)
18KFCMBL	18KFCMBR	18KFCM	18" Curb Mount Kit (output up to 500 sf)
N/A	N/A	21KFCM	21" Curb Mount Kit (output up to 700 sf)




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Light Pipe Extensions, Elbows, Tile Skirt and Dimmer, Light and Vent Kits

ACCESSORIES

TUBULAR


LIGHT PIPE EXTENSION – 1 FOOT SECTION



- Available for:
10", 13", 18", and 21" models

MODEL	PRODUCT
10P1	10" - 1 Foot Section
13P1	13" - 1 Foot Section
18P1	18" - 1 Foot Section
21P1	21" - 1 Foot Section

ELECTRIC LIGHT KIT - SINGLE OR DUAL SOCKET



- Available for:
10", 13", 18", and 21" models
- Choice of single or dual socket
- Use with CFL or LED bulbs

MODEL	PRODUCT
LK	Single Socket Light Kit
LK-2	Dual Socket Light Kit

LIGHT PIPE EXTENSION – 2 FOOT SECTION



- Available for:
10", 13", 18", and 21" models

MODEL	PRODUCT
10P2	10" - 2 Foot Section
13P2	13" - 2 Foot Section
18P2	18" - 2 Foot Section
21P2	21" - 2 Foot Section

SOLAR LED LIGHT KIT



- Solar powered
- Illuminates between 10-12 hours
- Includes rechargeable batteries
- Easy installation

MODEL	PRODUCT
SVF	10" Vent Kit

ANGLE ADAPTER / ELBOW



- 10" and 13" - adjusts 0° - 45°
- 18" and 21" - adjusts 0° - 30°

MODEL	PRODUCT
10E	10" - Elbow
13E	13" - Elbow
18E	18" - Elbow
21E	21" - Elbow

TURRET EXTENSION



- Available for 10" and 13" models
- Used on high profile S-tile roofs
- Powder coated black

MODEL	PRODUCT
10TE	10" Turret
13TE	13" Turret

EXHAUST VENT KIT (SVFAN)



- Available for 10" models
- Perfect for bath & laundry rooms
- Quiet motor exhausts 125 cfm
- Installs alone or with light kit

MODEL	PRODUCT
SVF	10" Vent Kit

TILE FLASHING SKIRT



- Available for:
10", 13" and 18" models
- Used for tile installations

MODEL	PRODUCT
10S	10" - Tile Skirt
13S	13" - Tile Skirt
18S	18" - Tile Skirt

DIMMER KIT with REMOTE CONTROL



May also be hardwired using a momentary switch.

MODEL	PRODUCT
10DM	10" - Dimmer Kit
13DM	13" - Dimmer Kit
18DM	18" - Dimmer Kit
21DM	21" - Dimmer Kit

**INDIVIDUAL COMPONENTS ALSO
AVAILABLE, PLEASE CALL FOR PRICING.**



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Roof, Curb and Gable Mount Solar Attic Fans

Adjustable Solar Panel

MODELS

SOLAR FANS



ROOF MOUNT SOLAR ATTIC FAN

- 32 and 48 watt models with adjustable solar panel
- Fully functional right out of box
- Powder coated black, bronze or mill finish aluminum
- Fits all roof slopes and roof types
- Meets stringent requirements of the Florida Building Code
- Hurricane Tested and Rated – HVHZ Compliant
- Limited Lifetime Warranty



Black	MODEL		PRODUCT DESCRIPTION
	Bronze	Mill Finish	
SAF32BL	SAF32BR	SAF32ML	32 Watt Roof Mount (output up to 1,560 cfms)
SAF48BL	SAF48BR	SAF48ML	48 Watt Roof Mount (output up to 1,881 cfms)




CURB MOUNT SOLAR ATTIC FAN

- 32 and 48 watt models with adjustable solar panel
- Fully functional right out of box
- Powder coated black, bronze or mill finish aluminum
- Installs over pre-built curb or Kennedy SAF-ACWU curb
- Meets stringent requirements of the Florida Building Code
- Hurricane Tested and Rated – HVHZ Compliant
- Limited Lifetime Warranty



Black	MODEL		PRODUCT DESCRIPTION
	Bronze	Mill Finish	
SAF32BLCM	SAF32BRCM	SAF32MLCM	32 Watt Curb Mount (output up to 1,560 cfms)
SAF48BLCM	SAF48BRCM	SAF48MLCM	48 Watt Curb Mount (output up to 1,881 cfms)

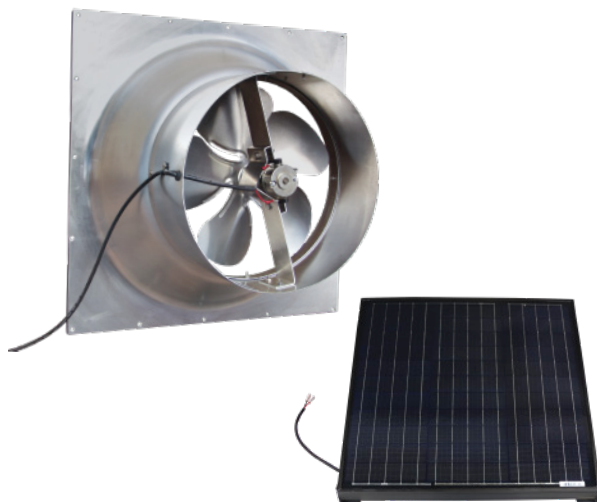

GABLE MOUNT SOLAR ATTIC FAN

- Available in 3 sizes: 32, 48, and 65 watt models
- Fan housing installs into existing gable opening
- Solar panel installed remotely on roof
- Fits all roof slopes and roof types
- Hurricane Tested and Rated – HVHZ Compliant
- Limited Lifetime Warranty



MODEL	PRODUCT DESCRIPTION
SAF32G	32 Watt Gable Mount (output up to 1,560 cfms)
SAF48G	48 Watt Gable Mount (output up to 1,881 cfms)
SAF65G	65 Watt Gable Mount (output up to 2,105 cfms)

www.kennedyskylights.com

TO PLACE ORDER, EMAIL: orders@kennedyskylights.com




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Ultra Low Profile and Tile Profile Solar Attic Fans

Fixed Solar Panel

MODELS

SOLAR FANS

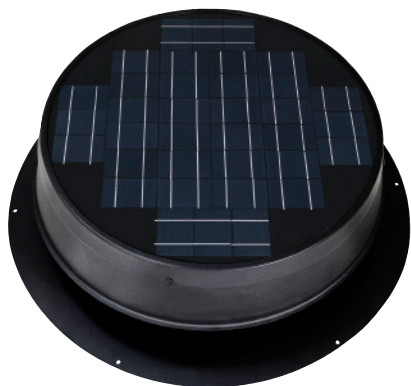

ULTRA LOW PROFILE ROOF MOUNT

- Features a compact, roof-hugging design
- 35 watt fan is fully functional right out of box
- Powder coated black, bronze or mill finish aluminum
- Fits all roof slopes and roof types
- Fixed solar panel withstands hurricane and tornadic winds
- Meets stringent requirements of the Florida Building Code
- Hurricane Tested and Rated – HVHZ Compliant
- Limited Lifetime Warranty



MODEL			PRODUCT DESCRIPTION
Black	Bronze	Mill Finish	
SAF35BLLP	SAF35BRLP	SAF35MLLP	35W Low-Pro Roof (output up to 1,597 cfms)



ULTRA LOW PROFILE CURB MOUNT

- Features a compact, roof-hugging design
- 35 watt fan is fully functional right out of box
- Powder coated black, bronze or mill finish aluminum
- Installs over pre-built curb or Kennedy SAF-ACWU curb
- Fixed solar panel withstands hurricane and tornadic winds
- Meets stringent requirements of the Florida Building Code
- Hurricane Tested and Rated – HVHZ Compliant
- Limited Lifetime Warranty



MODEL			PRODUCT DESCRIPTION
Black	Bronze	Mill Finish	
SAF35BLLPCM	SAF35BRLPCM	SAF35MLLPCM	35W Low-Pro Curb (output up to 1,597 cfms)



TILE PROFILE ROOF MOUNT

- Features a compact design
- 35 watt fan is fully functional right out of box
- Powder coated black, bronze or mill finish aluminum
- Housing sits 3" higher than the Low Profile model to accommodate thicker tile or slate roofing
- Perfect solution for the popular S-style tile roofs
- Fixed solar panel withstands hurricane and tornadic winds
- Meets stringent requirements of the Florida Building Code
- Hurricane Tested and Rated – HVHZ Compliant
- Limited Lifetime Warranty



MODEL			PRODUCT DESCRIPTION
Black	Bronze	Mill Finish	
SAF35BLTP	SAF35BRTP	SAF35MLTP	35 Watt Tile Profile (output up to 1,597 cfms)




Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Solar Attic Fan Aluminum Curb with Spruce Wood Interior 4" or 6" High Curb

SAF-ACWU

SOLAR FANS

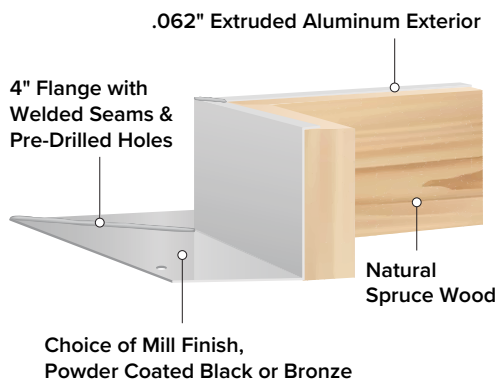

KEY FEATURES:

- 20.75" x 20.75" aluminum curb
- Sized to fit all Kennedy curb mount solar attic fans
- Choice of 4" or 6" high curb
- Natural spruce wood interior
- .062" extruded aluminum exterior with welded corners
- Pre-drilled screw holes for fast and easy installation
- Individually boxed

PRE-BUILT CURB ADVANTAGES:

- Saves time and simplifies installation
- Superior to galvanized metal or site-built curbs

AVAILABLE OPTIONS:

- Powder coated black exterior
- Powder coated bronze exterior
- Mill finish exterior

FITS THESE KENNEDY MODELS:

- SAF32CM
- SAF48CM
- SAF65CM
- SAF35LPCM

WARRANTY:

- 10-Year limited warranty against defects in workmanship and materials



Roof Pitch



20.75" x 20.75"

CURB SIZE

ROUGH OPENING Diameter	OUTSIDE FLANGE Width x Length	OUTSIDE CURB Width x Length
14" for 16" on Center	28.75" x 28.75"	20.75" x 20.75"
19" for 21" on Center		

SAF-ACWU WITH 4" CURB

MODEL NUMBER	WEIGHT
SAF - ACWU4	22 lbs

SAF-ACWU WITH 6" CURB

MODEL NUMBER	WEIGHT
SAF - ACWU6	25 lbs



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Remote Solar Attic Fans and Accessories

**REMOTE FANS
& ACCESSORIES**

SOLAR FANS

ROOF MOUNT with REMOTE PANEL SOLAR ATTIC FAN

- Used where there is limited sunshine available to installed fan
- Panel is installed away from fan assembly in a sunny area capturing the maximum amount of sunlight for optimal fan performance

Black	MODEL		PRODUCT DESCRIPTION
	Bronze	Mill Finish	
SAF32BL-Remote	SAF32BR-Remote	SAF32ML-Remote	32W Remote/Roof Mount (output up to 1,560 cfms)
SAF48BL-Remote	SAF48BR-Remote	SAF48ML-Remote	48W Remote/Roof Mount (output up to 1,881 cfms)
SAF65BL-Remote	SAF65BR-Remote	SAF65ML-Remote	65W Remote/Roof Mount (output up to 2,105 cfms)


CURB MOUNT with REMOTE PANEL SOLAR ATTIC FAN

- Used where there is limited sunshine available to installed fan
- Panel is installed away from fan assembly in a sunny area capturing the maximum amount of sunlight for optimal fan performance
- Installs over pre-built curb or Kennedy SAF-ACWU curb

Black	MODEL		PRODUCT DESCRIPTION
	Bronze	Mill Finish	
SAF32CMBL-Remote	SAF32CMBR-Remote	SAF32CMML-Remote	32W Remote/Curb Mount (output up to 1,560 cfms)
SAF48CMBL-Remote	SAF48CMBR-Remote	SAF48CMML-Remote	48W Remote/Curb Mount (output up to 1,881 cfms)
SAF65CMBL-Remote	SAF65CMBR-Remote	SAF65CMML-Remote	65W Remote/Curb Mount (output up to 2,105 cfms)



THERMAL SNAP SWITCH



- Turns fan on when attic temperature reaches 80°F
- Turns off at 70°F

MODEL	PRODUCT
SAFTS	Thermal Switch

FIRE SAFETY SWITCH



- Helps prevent spread of attic fires by shutting down fan
- Installed alone or with thermal switch

MODEL	PRODUCT
FSCS	Fire Safety Switch

GARAGE VENT KIT



- Converts roof or curb mount fan into garage venting system
- Radiation Damper Kit available (required in some locations)

MODEL	PRODUCT
Garage Vent	Garage Vent Kit
Garage Vent W/D	Garage Vent Kit w/Damper


TILE FLASHING SKIRT



- Used for tile installations
- Installs over flashing for weather-tight installation

MODEL	PRODUCT
13S	Flashing Skirt

TURRET EXTENSION



- Used on high profile S-tile roofs
- Includes protective animal screen

MODEL	PRODUCT
SAF-EXT	Turret Extension

**INDIVIDUAL COMPONENTS ALSO
AVAILABLE, PLEASE CALL FOR PRICING.**